

Refrigeration & Cooking

specifications & line drawings



The Migali Story

Migali Industries began in 1955 as the B.E. Migali corporation in a rented garage in South Philadelphia. Wanting to provide for his family and build something of his own, Bruno Migali acquired his first metal folding machine and started manufacturing metal kick-plates for the entry doors of row homes. He had years of previous experience in manufacturing and quickly moved beyond the simple kick-plates into hood systems, worktops and custom-made stainless steel kitchen cabinetry.

Demand continued to grow in the first few years of the business, and so did the sophistication and quality of Migali products. Bruno hired refrigeration engineers and production managers and focused exclusively on commercial refrigeration equipment for hotel, foodservice, bar and beverage customers. Migali soon grew nationally and became known for quality, durability and value.

Today, Migali Industries is an internationally recognized manufacturer of commercial refrigeration and cooking equipment. Migali products are still manufactured with quality and durability in mind but also offer sleek modern designs and technologies that maximize efficiencies and performance. Every unit is meticulously built and rigorously tested to perform even in the most challenging kitchen environments.



(Migali nameplates from 1955-1998)



(Migali Bottle Cooler 1957)



(Center - Migali's Founder, Bruno "Chick" Migali, 1985)

Migali proudly remains a privately held, third generation American family owned corporation. Ease of doing business, transparency and superior after-sale customer service are central to our business philosophy. It is our ongoing goal to offer the perfect balance of quality, service and price to our distributors and end-user customers.



(Ernie Migali Sr. - left, Bruno "Chick" Migali - right, 1998)

We manufacture in Blackwood, NJ and at sister factories abroad. The essential refrigeration and cooking equipment categories are stocked and ready to ship at most our nationwide warehouses. We would love to work with you and thank you for the opportunity to earn your business.

Join the family of Migali dealers now!



(Today's Migali Owners & NYC Reps)





Scan here to open an account. (www.migali.com/dealer)



(NAFEM Show Booth)

TABLE OF CONTENTS

Reach-In Refrigerators	_ 6
Reach-In Freezers	_ 8
Bottom Mount Reach-In Refrigerators	_ 10
Bottom Mount Reach-In Freezers	_ 12
Space Saving Two Door Reach-Ins	_ 14
Hinged Glass Door Refrigerators	_ 16
Sliding Glass Door Refrigerators	_ 20
Hinged Glass Door Freezers	_ 22
Pizza Preparation Tables	_ 24
Standard Top Sandwich Preparation Tables	_ 20
Big Top Sandwich Preparation Tables	_ 28
Under Counter/Work Top Refrigerators	_ 30
Under Counter/Work Top Freezers	_ 32
Refrigerated Chef Bases	_ 34
Glass Door Back Bar Refrigerators	_ 36
Solid Door Back Bar Refrigerators	_ 38
Direct Draw Beer Dispenser Refrigerators	_ 40
Horizontal Bottle Coolers	_ 46
Convection Ovens	_ 48
Ranges (Natural Gas & Liquid Propane)	_ 50
Ranges With Griddles (Natural Gas)	_ 52
Ranges With Griddles (Liquid Propane)	_ 54
Fryers	_ 56
Salamander Broilers	_ 58
Cheesemelters	_ 60
Griddles	_ 62
Thermostatic Griddles	_ 64
Hot Plates	_ 60
Char-Rock Broilers	_ 68
Radiant Broilers	_ 70
Stock Pot Stoves	_ 72
Warranty	_ 74











C-1R-HC

C-2R-HC

REACH-IN REFRIGERATORS

- Beautiful ergonomic construction & rounded corners
- · Digital temperature controller & read-out
- · All stainless steel exterior and interior
- · Forced air refrigeration system
- · Recessed door handles
- LED Interior Lighting
- Door locks
- 90 degree hold open door feature for loading products
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

- Top mount compressor for enhanced efficiency
- · Pre-installed casters and shelving
- Auto-defrost
- · Air plenum across back wall for even temperature distribution throughout cabinet interior
- All Natural R290 Hydrocarbon Refrigerant
- · US Department of Energy Certified
- Air Pressure Relief Valve for ease of opening doors

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CON- SUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-1R- LHH-HC	1 (left hinge)	21.4	3	1/7+	2.1	115/60/1	1.3	Nema 5-15P	+33°F (~) +41° F	28.8 x 31.5 x 81.25	24 x 26.1 x 60.2	30 x 34 x 85	220 lbs.	254 lbs.
C-1R-HC	1	21.4	3	1/7+	2.1	115/60/1	1.3	Nema 5-15P	+33° F (~) +41° F	28.8 x 31.5 x 81.25	24 x 26.1 x 60.2	30 x 34 x 85	220 lbs.	254 lbs.
C-2R-HC	2	43.2	6	1/5	3.2	115/60/1	2.1	Nema 5-15P	+33° F (~) +41° F	51.75 x 31.5 x 81.25	47 x 26.1 x 60.2	53 x 35 x 85	340 lbs.	390 lbs.
C-3R-HC	3	64.9	9	1/4+	4.2	115/60/1	2.4	Nema 5-15P	+33° F (~) +41° F	77.75 x 31.5 x 81.25	73.2 x 26.1 x 60.2	79 x 35 x 85	472 lbs.	551 lbs.


^{*} Total height includes casters

FOR COMMERCIAL USE ONLY




























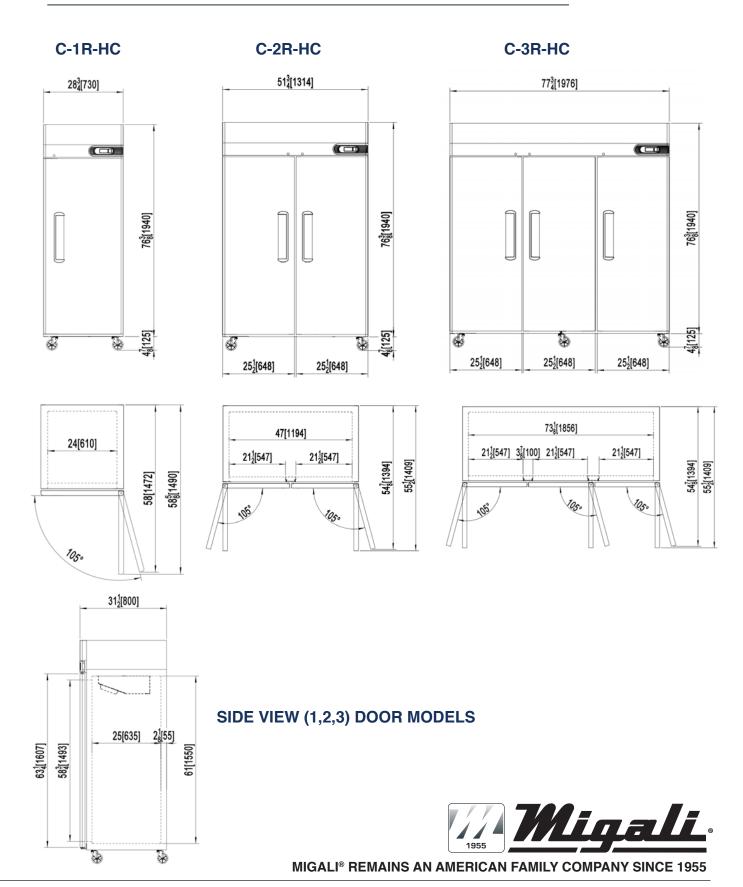





REACH-IN FREEZERS

- Beautiful ergonomic construction & rounded corners
- Digital temperature controller & read-out
- All stainless steel exterior and interior
- Forced air refrigeration system
- · Recessed door handles
- LED Interior Lighting
- Door locks
- 90 degree hold open door feature for loading products Air Pressure Relief Valve for ease of opening doors
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

- Top mount compressor for enhanced efficiency
- · Pre-installed casters and shelving
- Auto-defrost
- Air plenum across back wall for even temperature distribution throughout cabinet interior
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-1F- LHH-HC	1 (left hinge)	21.4	3	1/2	6.3	115/60/1	3.7	Nema 5-15P	-10° F (~) 0° F	28.8 x 31.5 x 81.25	24 x 26.1 x 60.2	30 x 34 x 85	236 lbs.	269 lbs.
C-1F-HC	1	21.4	3	1/2	6.3	115/60/1	3.7	Nema 5-15P	-10° F (~) 0° F	28.8 x 31.5 x 81.25	24 x 26.1 x 60.2	30 x 34 x 85	236 lbs.	269 lbs.
C-2F-HC	2	43.2	6	3/4+	8.6	115/60/1	6.2	Nema 5-15P	-10° F (~) 0° F	51.75 x 31.5 x 81.25	47 x 26.1 x 60.2	53 x 35 x 85	353 lbs.	404 lbs.
C-3F-HC	3	64.9	9	1	6.2	208-230/ 115/60/1	14.6	Nema L14- 20P	-10° F (~) 0° F	77.75 x 31.5 x 81.25	73.2 x 26.1 x 60.2	79 x 35 x 85	489 lbs.	569 lbs.

^{*} Total height includes casters


FOR COMMERCIAL USE ONLY

FOR COMMERCIAL USE ONLY




























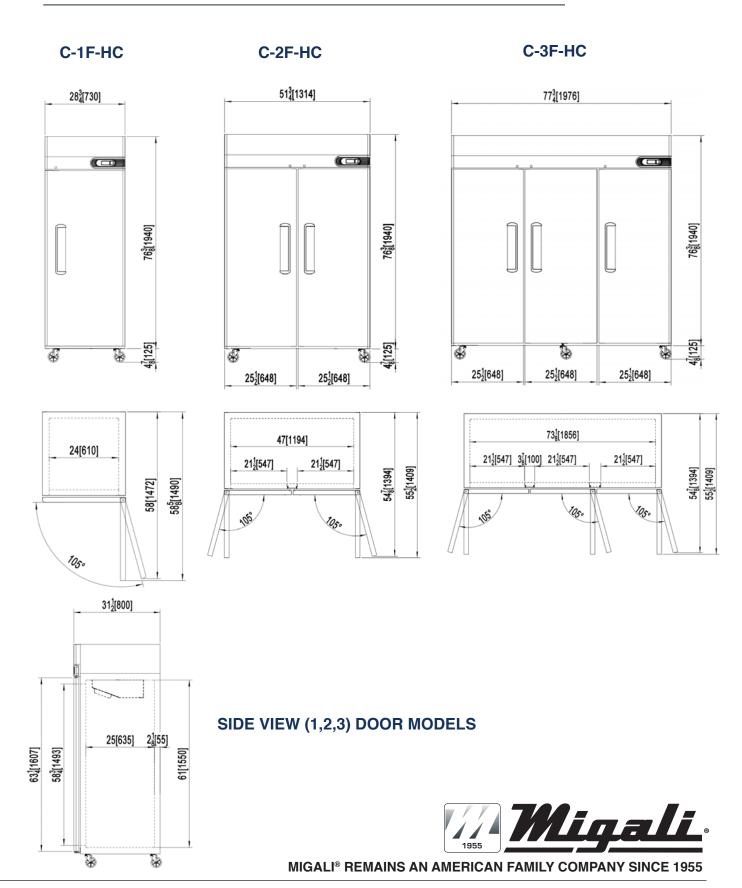









BOTTOM MOUNT REACH-IN REFRIGERATORS

- · Beautiful ergonomic construction & rounded corners
- Digital temperature controller & read-out
- · All stainless steel exterior and interior
- Forced air refrigeration system
- · Recessed door handles
- LED Interior Lighting
- Door locks
- 90 degree hold open door feature for loading products
- Migali® Protection Plan: 2 Year Parts & Labor Warranty,
 5 Years Compressor Warranty

- Bottom mount compressor for enhanced efficiency
- · Pre-installed casters and shelving
- Auto-defrost
- Air plenum across back wall for even temperature distribution throughout cabinet interior
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Air Pressure Relief Valve for ease of opening doors

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-1RB-HC	1	19.1	3	1/7+	2.1	115/60/1	1.09	Nema 5-15P	+33° F (~) +41° F	27 x 31.5 x 83.1	22.25 x 26.1 x 60	29 x 33.5 x 86.2	249 lbs.	282 lbs.
C-2RB-HC	2	44.7	6	1/5	3.2	115/60/1	2.36	Nema 5-15P	+33° F (~) +41° F	54.4 x 31.5 x 83.1	49.7 x 26.1 x 60	56.4 x 33.5 x 86.2	397 lbs.	452 lbs.
C-3RB-HC	3	68	9	1/4+	4.2	115/60/1	3.16	Nema 5-15P	+33° F (~) +41° F	81.9 x 31.5 x 83.1	77.2 x 26.1 x 60	83.9 x 33.5 x 86.2	538 lbs.	615 lbs.

^{*} Total height includes casters

FOR COMMERCIAL USE ONLY




























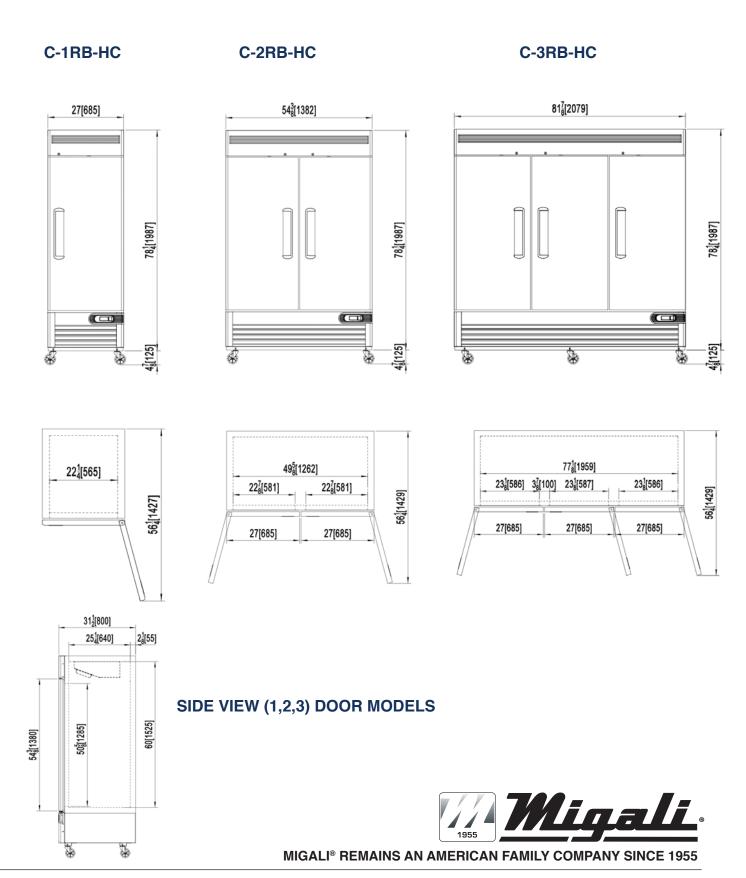









BOTTOM MOUNT REACH-IN FREEZERS

- Beautiful ergonomic construction & rounded corners
- Digital temperature controller & read-out
- · All stainless steel exterior and interior
- · Forced air refrigeration system
- · Recessed door handles
- LED Interior Lighting
- Door locks
- 90 degree hold open door feature for loading products Air Pressure Relief Valve for ease of opening doors
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

- Bottom mount compressor for enhanced efficiency
- · Pre-installed casters and shelving
- Auto-defrost
- · Air plenum across back wall for even temperature distribution throughout cabinet interior
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-1FB-HC	1	19.1	3	1/2	6.3	115/60/1	4.36	Nema 5-15P	-10° F (~) 0° F	27 x 31.5 x 83.1	22.25 x 26.1 x 60	29 x 33.5 x 86.2	264 lbs.	297 lbs.
C-2FB-HC	2	44.7	6	3/4+	8.6	115/60/1	7.82	Nema 5-15P	-10° F (~) 0° F	54.4 x 31.5 x 83.1	49.7 x 26.1 x 60	56.4 x 33.5 x 86.2	410 lbs.	465 lbs.
C-3FB-HC	3	68	9	1	6.2	208-230/ 115/60/1	14.67	Nema L14- 20P	-10° F (~) 0° F	81.9 x 31.5 x 83.1	77.2 x 26.1 x 60	83.9 x 33.5 x 86.2	551 lbs.	628 lbs.

* Total height includes casters

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE







TOLL FREE: 800.852.5292 WEB: www.migali.com



















C-1FB-HC C-2FB-HC C-3FB-HC 81⁷[2079] 54³[1382] 27[685] 784[1987] 77¹[1959] 498[1262] 224[565] $23_{8}^{1}[586]$ $3_{8}^{7}[100]$ $23_{8}^{1}[587]$ 22₈[581] 22⁷₈[581] 23₈[586] 56<mark>4</mark>[1427] 27[685] 27[685] 27[685] 27[685] 27[685] 31¹₂[800] 254[640] **SIDE VIEW (1,2,3) DOOR MODELS** 543[1380]

MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955







C-2FB-35-HC

SPACE SAVING TWO DOOR REACH-INS

- · Beautiful ergonomic construction & rounded corners
- · Digital temperature controller & read-out
- · All stainless steel exterior and interior
- Forced air refrigeration system
- · Recessed door handles
- LED Interior Lighting
- Door locks
- 90 degree hold open door feature for loading products
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

- Bottom mount compressor for enhanced efficiency
- · Pre-installed casters and shelving
- Auto-defrost
- · Air plenum across back wall for even temperature distribution throughout cabinet interior
- · All Natural R290 Hydrocarbon Refrigerant
- · US Department of Energy Certified
- · Air Pressure Relief Valve for ease of opening doors

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-2RB-35-HC	2	35	6	1/5	3.2	115/60/1	2.55	Nema 5-15P	39.5 x 31.5 x 83.1	34.75 x 26.1 x 60	41 x 33 x 85.8	317 lbs.	362 lbs.
C-2FB-35-HC	2	35	6	3/4+	8.6	115/60/1	7.56	Nema 5-15P	39.5 x 31.5 x 83.1	34.75 x 26.1 x 60	41 x 33 x 85.8	331 lbs.	375 lbs.

^{*} Total height includes casters

FOR COMMERCIAL USE ONLY






























C-2RB-35-HC & C-2FB-35-HC

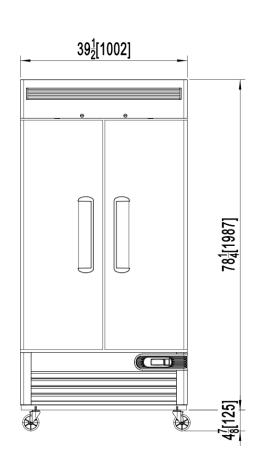

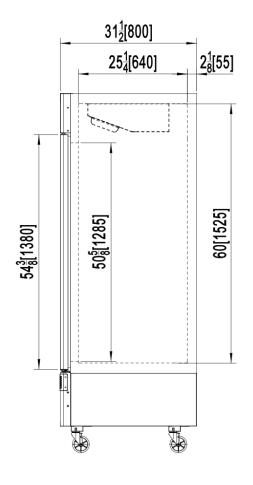















To learn more Scan QR codes



C-10RM-HC



C-12RM-HC

HINGED GLASS DOOR REFRIGERATORS

- Beautiful ergonomic construction
- Digital temperature controller & read-out
- White powder coated steel exterior and interior
- · Forced air refrigeration system
- · Bottom mount compressor
- · Recessed door handles
- · LED interior lighting
- · Bright lighted top display sign
- · Low-E, Dual pane glass**

- · Heavy duty ABS extruded door frame
- · Pre-installed casters and shelving
- 90 degree hold open door feature for loading products
- Door locks
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty
- Air Pressure Relief Valve for ease of opening doors

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-10RM-HC	1	10	3	1/7+	2.1	115/60/1	1.58	Nema 5-15P	+33° F (~) +41° F	24.25 x 24 x 63.25	20.25 x 17.9 x 42.9	26 x 25 x 62.25	189 lbs.	209 lbs.
C-12RM-HC	1	12	4	1/7+	2.1	115/60/1	1.83	Nema 5-15P	+33° F (~) +41° F	24.25 x 24 x 76.25	20.25 x 17.91 x 55.9	26 x 25 x 77	227 lbs.	251 lbs.

^{*} Total height includes 3" casters


FOR COMMERCIAL USE ONLY
































^{**}Glass panels are rated for installation at an altitude of < 2,000 ft.


C-10RM-HC






C-10RM-HC/ **C-12RM-HC SIDE VIEW**






C-10RM-HC / C-12RM-HC **TOP VIEW**

C-12RM-HC









C-23RM-HC



C-49RM-HC



C-72RM-HC



To learn more Scan QR codes







C-49RM-HC



C-72RM-HC

HINGED GLASS DOOR REFRIGERATORS

- Beautiful ergonomic construction
- Digital temperature controller & read-out
- White powder coated steel exterior and interior
- · Forced air refrigeration system
- · Bottom mount compressor
- · Recessed door handles
- LED interior lighting
- · Bright lighted top display sign
- · Low-E, Dual pane glass**

- · Heavy duty ABS extruded door frame
- · Pre-installed casters and shelving
- 90 degree hold open door feature for loading products
- Door locks
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty
- Air Pressure Relief Valve for ease of opening doors

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-23RM-HC	1	23	4	1/7+	2.1	115/60/1	1.7	Nema 5-15P	+33° F (~) +41° F	27 x 31.75 x 81.4	22.2 x 27.3 x 60	29 x 34 x 83	293 lbs.	324 lbs.
C-49RM-HC	2	49	8	1/5	3.2	115/60/1	3.6	Nema 5-15P	+33° F (~) +41° F	54.4 x 31.75 x 81.4	49.7 x 27.3 x 60	57 x 34 x 83	485 lbs.	544 lbs.
C-72RM-HC	3	72	12	1/4+	4.2	115/60/1	5.8	Nema 5-15P	+33° F (~) +41° F	81.9 x 31.75 x 81.4	77.1 x 27.3 x 60	84 x 34 x 83	652 lbs.	758 lbs.

^{*} Total height includes 3" casters


FOR COMMERCIAL USE ONLY




























^{**}Glass panels are rated for installation at an altitude of < 2,000 ft.

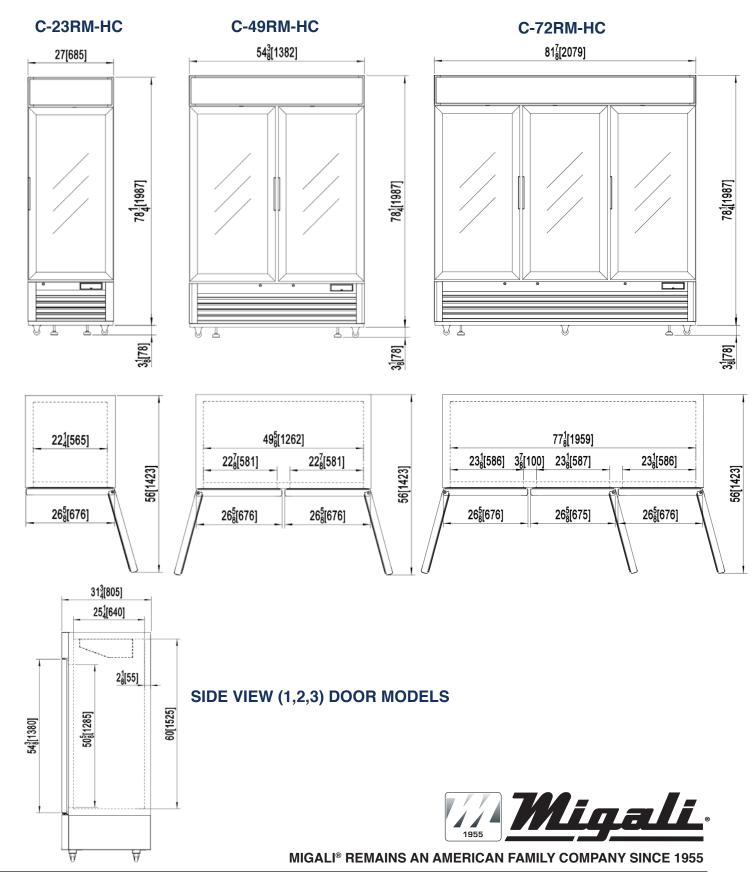







C-49RS-HC

SLIDING GLASS DOOR REFRIGERATOR

- · Beautiful ergonomic construction
- · Digital temperature controller & read-out
- White powder coated steel exterior and interior
- · Forced-air refrigeration system
- · Bottom mount compressor
- · Recessed door handles
- LED interior lighting
- Bright lighted top display sign
- · Low-E, dual pane glass**

- · Heavy duty ABS extruded door frame
- · Pre-installed casters and shelving
- Hold open door feature for loading products
- All Natural R290 Hydrocarbon Refrigerant
- · US Department of Energy Certified
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor
- · Air Pressure Relief Valve for ease of opening doors

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-49RS-HC	2	49	8	1/4+	4.2	115/60/1	4.8	Nema 5-15P	+33° F (~) +41° F	54.4 x 30 x 81.4	50.5 x 25 x 60	57 x 32 x 83	456 lbs.	511 lbs.

^{*} Total height includes 3" casters

**Glass panels are rated for installation at an altitude of < 2,000 ft.

FOR COMMERCIAL USE ONLY


































C-49RS-HC



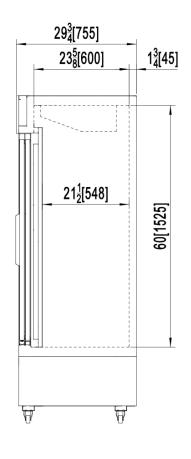







C-23FM-HC





C-49FM-HCe





To learn more Scan QR codes







C-49FM-HCe

C-72FM-HC

HINGED GLASS DOOR FREEZERS

- Beautiful ergonomic construction
- Digital temperature controller & read-out
- White powder coated steel exterior and interior
- · Forced air refrigeration system
- Bottom mount compressor
- · Recessed door handles
- LED interior lighting
- Bright lighted top display sign
- Low-E, Triple pane heated glass**

- · Heavy duty ABS extruded door frame
- · Pre-installed casters and shelving
- 90 degree hold open door feature for loading products
- Door locks
- · All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty
- Air Pressure Relief Valve for ease of opening doors

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-23FM-HC	1	23	4	1/2	6.3	115/60/1	6.6	Nema 5-15P	-10° F (~) 0° F	27 x 31.75 x 81.4	22.25 x 27.3 x 60	29 x 34 x 83	308 lbs.	340 lbs.
C-49FM-HCe	2	49	8	3/4+	8.6	115/60/1	12.1	Nema 5-15P	-10° F (~) 0° F	54.4 x 31.75 x 81.4	49.7 x 27.3 x 60	57 x 34 x 83	498 lbs.	558 lbs.
C-72FM-HC	3	72	12	1	6.2	208-230/ 115/60/1	19.1	Nema L14- 20P	-10° F (~) 0° F	82 x 31.75 x 81.4	77.1 x 27.3 x 60	84 x 34 x 83	688 lbs.	722 lbs.


^{*} Total height includes 3" casters

FOR COMMERCIAL USE ONLY




























^{**}Glass panels are rated for installation at an altitude of < 2,000 ft.

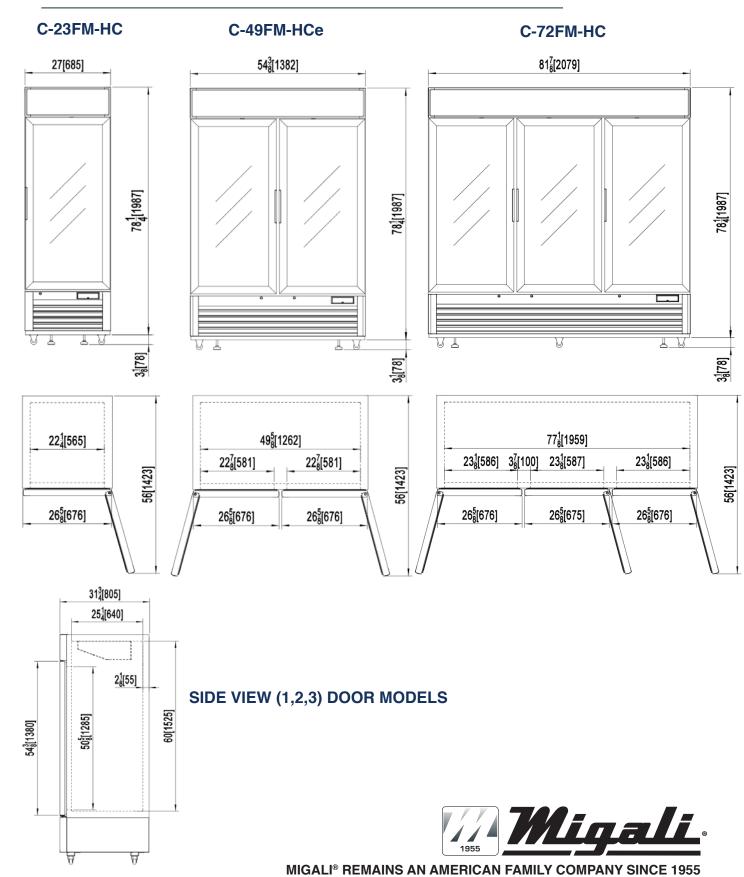





PIZZA PREPARATION TABLES

- Digital temperature controller and read-out
- All stainless steel exterior and interior
- Forced air refrigeration system
- Side mount compressor for enhanced efficiency
- 19^{1/2"} deep cutting board included
- · Recessed door handles
- · Pre-installed casters and shelving

- · Beautiful ergonomic construction & rounded corners · 90 degree hold open door feature for loading products
 - · All Natural R290 Hydrocarbon Refrigerant
 - US Department of Energy Certified
 - Rail accomodates 4" deep pans
 - · Insulated lids help ensure food products in rail stay cold
 - Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

															•
MODEL	DOORS	NUM. OF (1/3) SIZE PANS*	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H**	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H**	WEIGHT	PACKAGED WEIGHT
C-PP44-HC	1	6	14	1	1/7+	2.3	115/60/1	1.5	Nema 5-15P	+33° F (~) +41° F	44 x 33 x 43.4	40.4 x 26.4 x 26.3	47 x 35 x 46	238 lbs.	295 lbs.
C-PP67-HC	2	9	20	2	1/5	2.8	115/60/1	2.1	Nema 5-15P	+33° F (~) +41° F	67 x 33 x 43.4	63.5 x 26.4 x 26.3	68 x 35 x 46	335 lbs.	405 lbs.
C-PP93-HC	3	12	26	3	1/4+	3.1	115/60/1	2.6	Nema 5-15P	+33° F (~) +41° F	93 x 33 x 43.4	89.4 x 26.4 x 26.3	95 x 35 x 46	427 lbs.	527 lbs.

^{*} Pans are not included

* * Height is measured floor to the top of the pan rail and include 6" casters

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE







TOLL FREE: 800.852.5292 WEB: www.migali.com





















C-PP44-HC C-PP67-HC C-PP93-HC

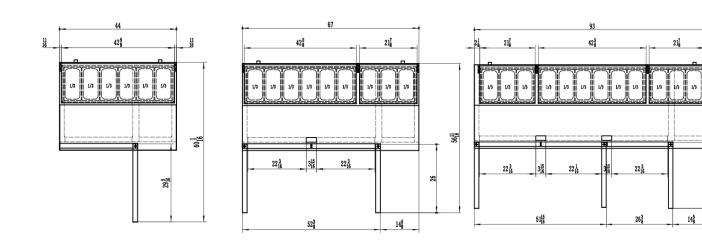



SIDE VIEW (1,2,3) DOOR MODELS



MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955





STANDARD TOP SANDWICH PREPARATION TABLES

- · Beautiful ergonomic construction & rounded corners · Pre-installed casters and shelving
- Digital temperature controller and read-out
- · All stainless steel exterior and interior
- Forced air refrigeration system
- 91/4" deep cutting board included
- Recessed door handles
- · Rail accomodates 6" deep pans

- 90 degree hold open door feature for loading products
- · All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- · Insulated hood and lids ensure food products in rail stay cold
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

MODEL	DOORS	NUM. OF (1/6) SIZE PANS*	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H**	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H**	WEIGHT	PACKAGED WEIGHT
C-SP27- 8-HC	1	8	6.5	2	1/7+	2.3	115/60/1	1.6	Nema 5-15P	+33° F (~) +41° F	27.5 x 30 x 44.25	23.9 x 23.6 x 26.7	30 x 33 x 46	158 lbs.	196 lbs.
C-SP48- 12-HC	2	12	12	4	1/7+	2.3	115/60/1	1.8	Nema 5-15P	+33° F (~) +41° F	48.25 x 30 x 44.25	44.7 x 23.6 x 26.7	51 x 33 x 46	231 lbs.	275 lbs.
C-SP60- 16-HC	2	16	20	4	1/5	2.8	115/60/1	2.1	Nema 5-15P	+33° F (~) +41° F	60.25 x 30 x 44.25	56.7 x 23.6 x 26.7	64 x 33 x 46	271 lbs.	319 lbs.
C-SP72- 18-HC	3	18	22	6	1/5	2.8	115/60/1	2.2	Nema 5-15P	+33° F (~) +41° F	72.7 x 30 x 44.25	68.9 x 23.6 x 26.7	75 x 33 x 46	317 lbs.	379 lbs.

^{*} Pans are not included

* * Total height includes casters

FOR COMMERCIAL USE ONLY




























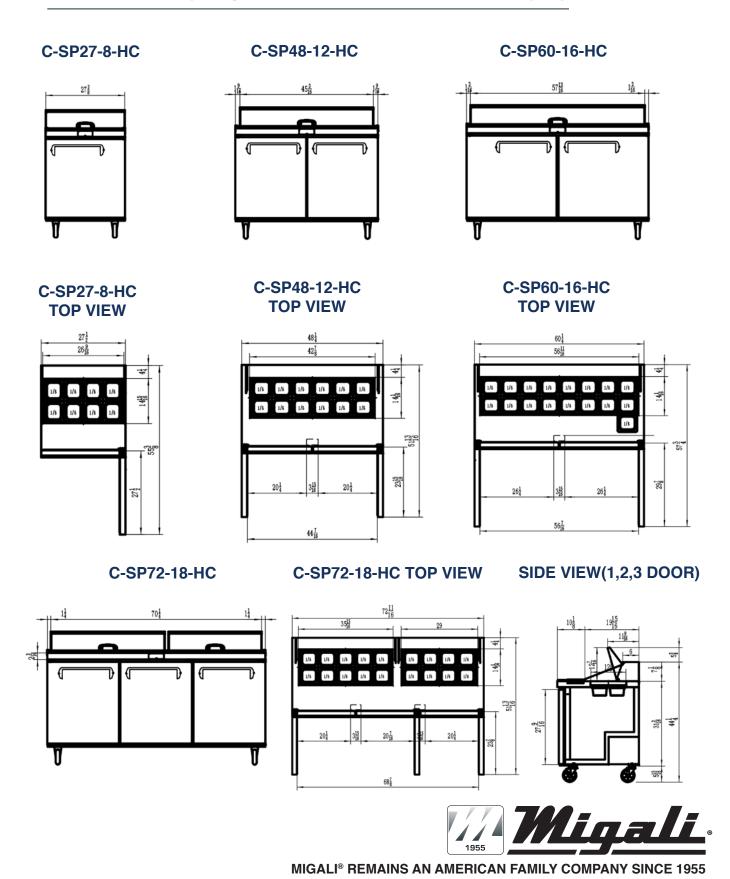





BIG TOP SANDWICH PREPARATION TABLES

- Beautiful ergonomic construction & rounded corners Pre-installed casters and shelving
- Digital temperature controller and read-out
- All stainless steel exterior and interior
- · Forced air refrigeration system
- 91/4" deep cutting board included
- · Recessed door handles

- 90 degree hold open door feature for loading products
- · All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- · Insulated hood and lids ensure food products in rail stay cold
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

MODEL	DOORS	NUM. OF (1/6) SIZE PANS*	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H**	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H**	WEIGHT	PACKAGED WEIGHT
C-SP27- 12BT-HC	1	12	7.9	2	1/7+	2.3	115/60/1	1.6	Nema 5-15P	+33° F (~) +41° F	27.5 x 34 x 47.2	23.9 x 23.6 x 26.4	30 x 37 x 51	170 lbs.	212 lbs.
C-SP48- 18BT-HC	2	18	14.7	4	1/7+	2.3	115/60/1	1.9	Nema 5-15P	+33° F (~) +41° F	48.25 x 34 x 47.2	44.7 x 23.6 x 26.4	51 x 37 x 51	243 lbs.	294 lbs.
C-SP60- 24BT-HC	2	24	20.7	4	1/5	2.8	115/60/1	2.1	Nema 5-15P	+33° F (~) +41° F	60.25 x 34 x 47.2	56.7 x 23.6 x 26.4	64 x 37 x 51	285 lbs.	340 lbs.
C-SP72- 30BT-HC	3	30	25.2	6	1/5	2.8	115/60/1	2.3	Nema 5-15P	+33° F (~) +41° F	72.7 x 34 x 47.2	69.1 x 23.6 x 26.4	75 x 37 x 51	331 lbs.	402 lbs.

^{*} Pans are not included

FOR COMMERCIAL USE ONLY





























^{* *} Total height includes casters

C-SP27-12BT-HC




C-SP48-18BT-HC




C-SP60-24BT-HC




C-SP27-12BT-HC TOP VIEW




C-SP48-18BT-HC TOP VIEW




C-SP60-24BT-HC TOP VIEW




C-SP72-30BT-HC



C-SP72-30BT-HC TOP VIEW



SIDE VIEW (1,2,3 DOOR MODELS)





MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955











C-U27R-HC

C-U48R-HC

C-U60R-HC

C-U72R-HC

UNDER-COUNTER/WORK TOP REFRIGERATORS

- Beautiful ergonomic construction & rounded corners
- Digital temperature controller and read-out
- · All stainless steel exterior and interior
- Forced air refrigeration system
- · Recessed door handles
- · Pre-installed casters and shelving

- 90 degree hold open door feature for loading products
- · Optional Accessory: Backsplash for Work-Tops for in-the-field installment**, Shorter 3" casters available***
- · All Natural R290 Hydrocarbon Refrigerant
- · US Department of Energy Certified
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-U27R-HC	1	6.5	2	1/7+	2.3	115/60/1	0.83	Nema 5-15P	+33° F (~) +41° F	27.5 x 30 x 34.1	23.9 x 23.6 x 26.7	29 x 32 x 39	137 lbs.	172 lbs.
C-U48R-HC	2	12	4	1/7+	2.3	115/60/1	1 And Printers	Nema 5-15P	+33° F (~) +41° F	48.25 x 30 x 34.1	44.7 x 23.6 x 26.7	50 x 32 x 39	192 lbs.	232 lbs.
C-U60R-HC	2	17.9	4	1/5	2.8	115/60/1	1.2	Nema 5-15P	+33° F (~) +41° F	60.25 x 30 x 34.1	56.7 x 23.6 x 26.7	63 x 32 x 39	219 lbs.	265 lbs.
C-U72R-HC	3	32.8	6	1/5	2.8	115/60/1	1.3	Nema 5-15P	+33° F (~) +41° F	72.7 x 30 x 34.1	56.7 x 23.6 x 26.7	74 x 32 x 39	254 lbs.	316 lbs.

^{*} Total height includes casters

**Accessories: Stainless Steel Back Splash - BS27 - 27" wide / BS48 - 48" wide / BS60 - 60" wide


*** Optional 6" casters available - Part # 1759-208

FOR COMMERCIAL USE ONLY




























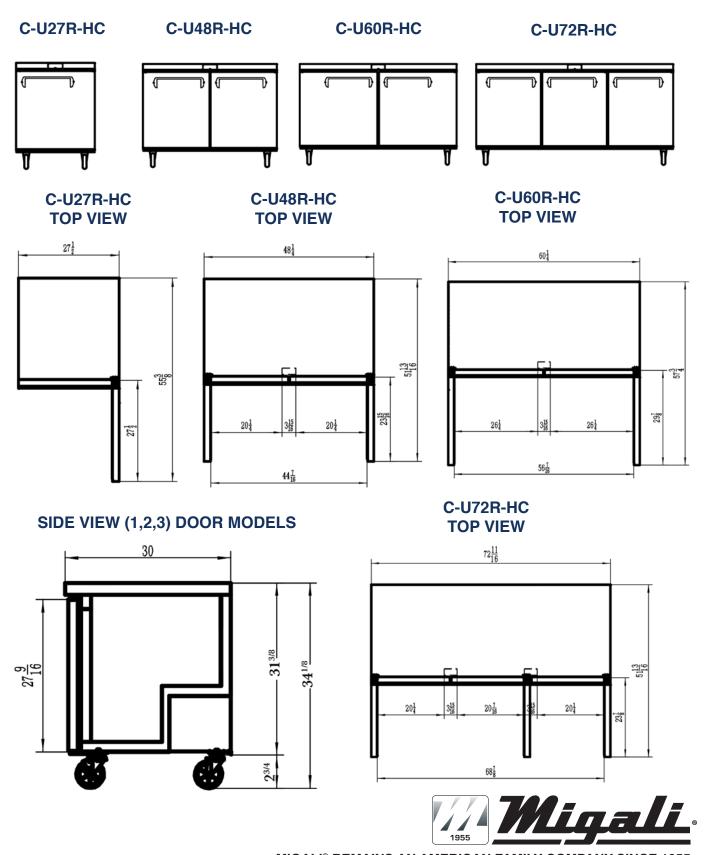









C-U27F-HC C-U48F-HC

C-U60F-HC

UNDER-COUNTER/WORK TOP FREEZERS

- Beautiful ergonomic construction & rounded corners
- · Digital temperature controller and read-out
- · All stainless steel exterior and interior
- Forced air refrigeration system
- · Recessed door handles
- · Pre-installed casters and shelving

- 90 degree hold open door feature for loading products
- Optional Accessory: Backsplash for Work-Tops for in-the-field installment**, Taller 6" casters available***
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Migali® Protection Plan: 2 Year Parts & Labor Warranty,
 5 Years Compressor Warranty

MODEL	DOORS	CAPACITY CU/FT	SHELVES	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H*	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-U27F-HC	1	6.5	2	1/5	1.8	115/60/1	2.7	Nema 5-15P	-7° F (~) 3° F	27.5 x 30 x 34.1	23.9 x 23.6 x 26.7	29 x 32 x 39	146 lbs.	179 lbs.
C-U48F-HC	2	12	4	1/4+	2.6	115/60/1	4.1	Nema 5-15P	-7° F (~) 3° F	48.25 x 30 x 34.1	44.7 x 23.6 x 26.7	50 x 32 x 39	203 lbs.	245 lbs.
C-U60F-HC	2	17.9	4	1/4+	2.6	115/60/1	4.9	Nema 5-15P	-7° F (~) 3° F	60.25 x 30 x 34.1	56.7 x 23.6 x 26.7	63 x 32 x 39	230 lbs.	276 lbs.

^{*} Total height includes casters

**Accessories: Stainless Steel Back Splash - BS27 - 27" wide / BS48 - 48" wide / BS60 - 60" wide

*** Optional 6" casters available - Part # 1759-208

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE







TOLL FREE: 800.852.5292 WEB: www.migali.com





















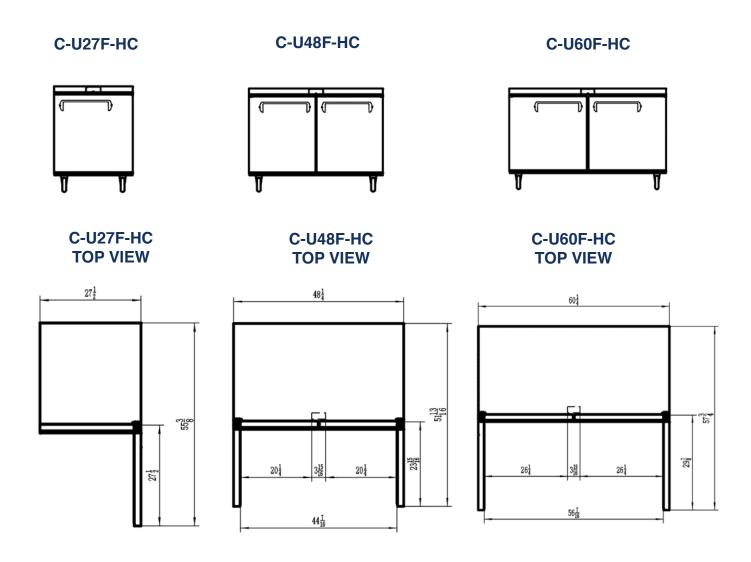



SIDE VIEW (1,2,3) DOOR MODELS



MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955















REFRIGERATED CHEF BASES

- · Beautiful ergonomic appearance
- · Heavy duty top surface area
- Digital temperature controller and read-out
- All stainless steel exterior and interior
- Forced air refrigeration system
- · Recessed drawers handles
- Drawers accommodate 4" deep pans

- · Stainless Steel, heavy-duty, self closing drawer slides
- Pre-installed casters
- (2) 6" locking casters & (2) 6" non-locking casters
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Side mount compressor for enhanced efficiencies Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

MODEL	DRAWERS	CAPACITY CU/FT	TOP WEIGHT LIMIT	NUM. OF (1/6) SIZE PANS*	H/P	AMPS	VOLTAGE	ENERGY CONSUMPTION KWH/24 HR	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-CB48- HC	2	9.4	717 lbs.	15	1/7+	2.3	115/60/1	1.6	Nema 5-15P	+33° F (~) +41° F	48.4 x 32 x 26.2	36.2 x 25.6 x 16.7	51 x 33.9 x 27.6	221 lbs.	258 lbs.
C-CB52- HC	2	10.4	717 lbs.	18	1/7+	2.3	115/60/1	1.6	Nema 5-15P	+33° F (~) +41° F	52 x 32 x 26.2	40 x 25.6 x 16.7	51 x 33.9 x 27.6	230 lbs.	274 lbs.
C-CB52- 60-HC	2	10.4	717 lbs.	18	1/7+	2.3	115/60/1	1.6	Nema 5-15P	+33° F (~) +41° F	60.5 x 32 x 26.2	40 x 25.6 x 16.7	63 x 33.9 x 27.6	234 lbs.	283 lbs.
C-CB72- HC	4	15	1084 lbs.	24	1/7+	2.3	115/60/1	1.8	Nema 5-15P	+33° F (~) +41° F	72.5 x 32 x 26.2	57.5 x 25.6 x 16.7	75 x 33.9 x 27.6	300 lbs.	364 lbs.
C-CB72- 76-HC	4	15	1084 lbs.	24	1/7+	2.3	115/60/1	1.8	Nema 5-15P	+33° F (~) +41° F	76 x 32 x 26.2	57.5 x 25.6 x 16.7	78.6 x 33.9 x 27.6	309 lbs.	369 lbs.

* Pans not included

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE







TOLL FREE: 800.852.5292 WEB: www.migali.com





















MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955









C-BB48G-HC

C-BB60G-HC

C-BB72G-HC

GLASS DOOR BACK BAR REFRIGERATORS

- · Beautiful ergonomic construction
- · Black corrosion resistant steel exterior, stainless steel interior and stainless steel top
- · Digital temperature controller and read-out
- Forced air refrigeration system
- · Side mount compressor
- · Safety-grip door handles
- LED interior lighting
- Door locks
- · Leveling feet included
- · Accessory: optional casters upon request
- · All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- · Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

MODEL	DOORS	CAPACITY CU/FT	STORAGE CAPACITY	SHELVES	H/P	AMPS	VOLTAGE	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-BB48G-HC	2	13	546 (12 oz.) cans 336 (12 oz.) bottles 2 (1/2 barrel) kegs	4	1/5	2.8	115/60/1	Nema 5-15P	+33° F (~) +38° F	48.75 x 24.5 x 35.7	36.25 x 18.25 x 30.5	51.25 x 27.5 x 41.75	231 lbs.	282 lbs.
C-BB60G-HC	2	17.3	756 (12 oz.) cans 456 (12 oz.) bottles 2 (1/2 barrel) kegs	4	1/5	2.8	115/60/1	Nema 5-15P	+33° F (~) +38° F	60.75 x 25.75 x 35.7	48.25 x 18.5 x 28.9	63.5 x 27.5 x 41.75	276 lbs.	319 lbs.
C-BB72G-HC	3	21.6	966 (12 oz.) cans 576 (12 oz.) bottles 3 (1/2 barrel) kegs	6	1/4	3.96	115/60/1	Nema 5-15P	+33° F (~) +38° F	72.75 x 24.5 x 35.7	60.2 x 18.5 x 30.5	75.25 x 27.5 x 41.75	331 lbs.	374 lbs.

Accessories:

- · Caster stem with brake (5-3/4" overall) Part Number 1597-01
- · Caster plate with brake (5-1/4" overall) Part Number 2481-329

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE







TOLL FREE: 800.852.5292 WEB: www.migali.com


















C-BB48G-HC C-BB60G-HC C-BB72G-HC

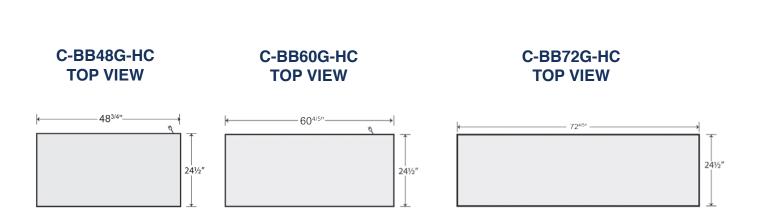













C-BB48-HC

C-BB60-HC

SOLID DOOR BACK BAR REFRIGERATORS

- · Beautiful ergonomic construction
- · Black corrosion resistant steel exterior, stainless steel interior and stainless steel top
- · Digital temperature controller and read-out
- · Forced air refrigeration system
- · Side mount compressor
- · Recessed door handles
- LED interior lighting
- Door locks
- · Leveling feet included
- · Accessory: optional casters upon request
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Migali[®] Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

MODEL	DOORS	CAPACITY CU/FT	STORAGE CAPACITY	SHELVES	H/P	AMPS	VOLTAGE	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-BB48-HC	2	13	546 (12 oz.) cans 336 (12 oz.) bottles 2 (1/2 barrel) kegs	4	1/5	2.8	115/60/1	Nema 5-15P	+33° F (~) +38° F	48.75 x 24.4 x 35.7	36.25 x 18.5 x 28.9	51.25 x 27.5 x 41.75	231 lbs.	282 lbs.
C-BB60-HC	2	17.3	756 (12 oz.) cans 456 (12 oz.) bottles 2 (1/2 barrel) kegs	4	1/5	2.8	115/60/1	Nema 5-15P	+33° F (~) +38° F	60.75 x 24.5 x 35.7	48.25 x 18.5 x 29	63.5 x 27.5 x 41.75	276 lbs.	319 lbs.
C-BB72-HC	3	21.6	966 (12 oz.) cans 576 (12 oz.) bottles 3 (1/2 barrel) kegs	6	1/3	3.96	115/60/1	Nema 5-15P	+33° F (~) +38° F	72.75 x 24.5 x 35.7	60.2 x 18.5 x 31.5	75.25 x 27.5 x 41.75	331 lbs.	374 lbs.

Accessories:

- · Caster stem with brake (5-3/4" overall) Part Number 1597-01
- · Caster plate with brake (5-1/4" overall) Part Number 2481-329

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

























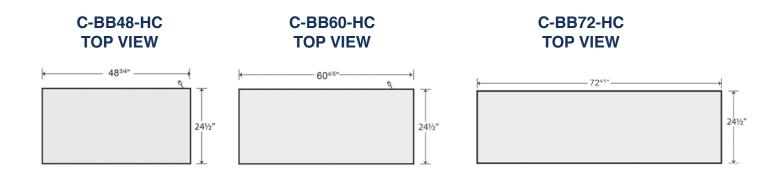

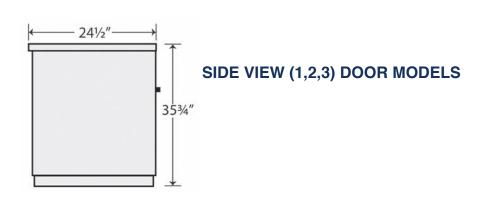











C-DD48-2-HC



C-DD60-2-HC



C-DD72-3-HC

DIRECT DRAW BEER DISPENSER REFRIGERATORS

- · Beautiful ergonomic appearance
- Digital temperature controller and read-out
- Black corrosion resistant steel exterior, stainless steel interior and stainless steel top
- · Forced air refrigeration system
- · Air tubes to refrigerate beer towers
- Side mount compressor
- · Recessed door handles

- Leveling feet included
- · Accessory: optional casters upon request
- · All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

MODEL	DOORS	CAPACITY CU/FT	1/2 BARREL KEG CAPACITY*	BEER TOWERS INCLUDED	H/P	AMPS	VOLTAGE	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W X D X H**	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-DD23-1-HC	1	7.8	1	(1) double head	1/7+	1.92	115/60/1	Nema 5-15P	+33° F (~) +41° F	23.5 x 30.75 x 34.8	19.5 x 18.2 x 28.7	26 x 32.5 x 45	132 lbs.	176 lbs.
C-DD48-2-HC	2	13	2	(1) single head	1/5	3	115/60/1	Nema 5-15P	+33° F (~) +41° F	48.75 x 24.4 x 35.7	36.25 x 18.5 x 28.9	51.25 x 27.5 x 41.75	231 lbs.	275 lbs.
C-DD60-2-HC	2	17.3	2	(2) single head	1/5	3	115/60/1	Nema 5-15P	+33° F (~) +41° F	60.75 x 24.4 x 35.7	48.25 x 18.5 x 28.9	63.5 x 27.5 x 41.75	276 lbs.	319 lbs.
C-DD72-3-HC	3	21.6	3	(2) single head	1/3+	4	115/60/1	Nema 5-15P	+33° F (~) +41° F	72.8 x 24.4 x 35.7	60.2 x 18.5 x 28.9	75.25 x 27.5 x 41.75	331 lbs.	374 lbs.

^{*} More combinations of keg types on spec sheet

- · Dual Head Beer Tower Part # 2481-233 (includes beer line and Sanky tap)
- · Dual Head Beer Tower CO2 gas tank and regulator are not included
- · Caster stem with brake (5-3/4" overall) Part Number 1597-01
- · Caster plate with brake (5-1/4" overall) Part Number 2481-329

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE



























^{**} Height does not include draft tower


C-DD23-1-HC




C-DD48-2-HC




C-DD60-2-HC



C-DD23-1-HC TOP VIEW




C-DD48-2-HC TOP VIEW




C-DD60-2-HC TOP VIEW




C-DD72-3-HC



C-DD72-3-HC TOP VIEW



SIDE VIEW (1,2,3) DOOR MODELS







MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955





INSIDE CAPACITY FOR THE C-DD23-1-HC











KEG SIZE COLOR KEY



NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE

































INSIDE CAPACITY FOR THE C-DD48-2-HC











KEG SIZE COLOR KEY




STANDARD HALF KEG




1/4 SLIM KEG































INSIDE CAPACITY FOR THE C-DD60-2-HC


















KEG SIZE COLOR KEY





































INSIDE CAPACITY FOR THE C-DD72-3-HC




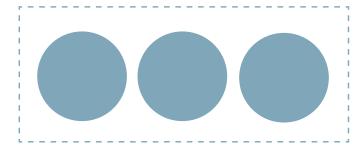






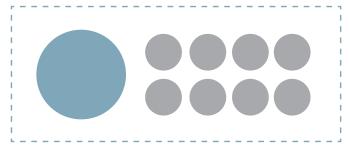



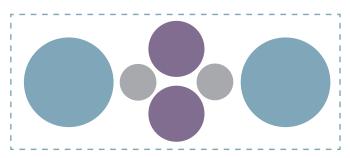

KEG SIZE COLOR KEY



































C-HBC50-HC

C-HBC65-HC

C-HBC95-HC

HORIZONTAL BOTTLE COOLERS

- · Beautiful ergonomic appearance
- · Digital temperature controller and read-out
- Black corrosion resistant steel exterior, stainless steel interior and stainless steel top
- · Forced air refrigeration system
- Side mount compressor
- · Leveling feet included
- · Door locks for each lid
- · Epoxy coated wire bin dividers included

- Bottle opener and cap catcher included
- · Accessory: optional casters upon request
- All Natural R290 Hydrocarbon Refrigerant
- US Department of Energy Certified
- Migali® Protection Plan: 2 Year Parts & Labor Warranty, 5 Years Compressor Warranty

MODEL	SLIDING LIDS WITH LOCK	STORAGE CAPACITY	CAPACITY CU/FT	BIN DIVIDERS	H/P	AMPS	VOLTAGE	PLUG TYPE	TEMP RANGE	EXTERIOR DIMENSIONS W x D x H	INTERIOR DIMENSIONS W x D x H	PACKAGED DIMENSIONS W x D x H	WEIGHT	PACKAGED WEIGHT
C-HBC50-HC	2	16.5 (12oz) Bottle Cases/ 24 (12 oz) Can Cases	12.7	3	1/7+	2.3	115/60/1	Nema 5-15P	+33° F (~) +41° F	49.5 x 28 x 34.25	45.4 x 23 x 26	56 x 32.75 x 41.75	181 lbs.	224 lbs.
C-HBC65-HC	2	24 (12oz) Bottle Cases/ 32 (12 oz) Can Cases	17.5	3	1/7+	2.6	115/60/1	Nema 5-15P	+33° F (~) +41° F	64.25 x 28 x 34.25	60.4 x 23 x 26	70 x 32.75 x 41.75	254 lbs.	297 lbs.
C-HBC95-HC	3	37 1/2 (12oz) Bottle Cases/ 55 (12 oz) Can Cases	26.6	5	1/3	4.2	115/60/1	Nema 5-15P	+33° F (~) +41° F	95.25 x 28 x 34.25	91.2 x 23 x 26	100.5 x 32.75 x 41.75	386 lbs.	429 lbs.

Accessories:

· Caster - stem - with brake (5-3/4" overall) - Part Number 1597-01

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE




























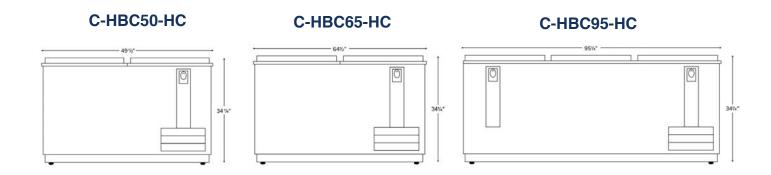

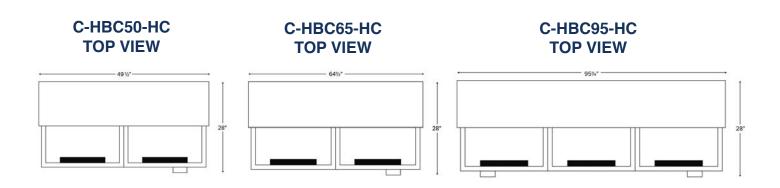

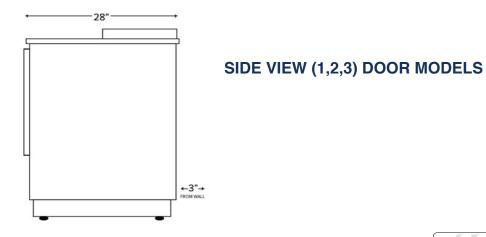







C-CO1-NG/LP



- Stainless steel exterior and enamel interior with coved corners for easy cleaning
- 50/50 dependent doors with double pane thermal tempered glass
- Size accommodates five 18" x 26" standard full-size baking pans left to right or front to back
- Solid state digital controller with "Hold" cooking temperature feature
- Temperature range: 150°F to 500°F
- · Interior oven light standard



(2) C-CO1-NG/LP Stacked

- 46,000 BTU's per oven
- Dual speed-fan with an adjustable cooling mode, (5) nickel plated oven racks on 13-position rack guides
- · Fan delay switch when doors are opened
- · Electronic spark ignition with an automatic pilot system
- Safety shut off switch
- 3/4" NPT rear gas connection and regulator
- Nema 5-15 plug for controller
- Migali Industries® Protection Plan: 1 Year Parts & Labor Warranty

MODEL	BURNERS	GAS SPECS	SHELVES	RACK GUIDES	VOLTAGE	TOTAL BTU	BTU PER BURNER	INTAKE-TUBE PRESSURE (IN W.C.)	AMPS	EXTERIOR DIMENSIONS W X D X H	INTERIOR DIMENSIONS W X D X H	PACKAGING DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-CO1-NG	2	NG	5	13	115/60/1	46,000	23,000	5	9.0	38.2 x 48.6 x 59.4	29 x 24 x 27.7	41.4 x 52.4 x 41.5	487 lbs.	615 lbs.
C-CO1-LP	2	LP	5	13	115/60/1	46,000	23,000	5	9.0	38.2 x 48.6 x 59.4	29 x 24 x 27.7	41.4 x 52.4 x 41.5	487 lbs.	615 lbs.

Optional: Kit to Double Stack Ovens, Part # 1759-1586

NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE
























C-CO1-NG/LP










SIDE VIEW - SINGLE

(2x) C-CO1-NG/LP







SIDE VIEW - DOUBLE



MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955









C-RO6-NG/LP



C-RO8-NG/LP



C-RO10-NG/LP

RANGES (NATURAL GAS & LIQUID PROPANE)

- High polished, stainless steel exterior
- NG 25,000/LP 23,000 BTU/Hr rating per burner
- Heavy duty cast iron removable trivets
- · Porcelain enamel over steel oven interior
- Beautiful ergonomic design and easy to clean
- Chrome temperature knobs & oven handle
- · Adjustable temperature oven knob
- Standard with 6" casters (2x locking)

- · Adjustable oven shelf
- · Safety pilot oven shut-off, high limit switch
- · Manual ignition of burners
- · Valve type: Pilot lit, continuously on
- · All burners and gas tubing are constructed of stainless steel
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty

MODEL	BURNERS	TOTAL BTU NG/LP	BTU PER BURNER NG/LP	OVEN BTU/H NG / LP	IN TAKE TUBE PRESSURE (W.C.) NG/LP	NOZZLE NO. NATURAL GAS	NOZZLE NO. LIQUID PROPANE	BURNER WORK SURFACE W X D	NO. OF OVENS & INTERIOR DIMENSIONS W X D X H	EXTERIOR DIMENSIONS W X D X H*	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-RO4-NG / LP	4	124,000 / 116,000	25,000 / 23,000	24,000 / 24,000	5 /10	Hotplate - NG45 Oven - NG44	Hotplate - LP54 Oven - LP53	11.8 x 11.8	(1) Oven 20 × 26 × 14	24 × 32.6 × 56.4	24.2 x 41.9 x 41.3	302 lbs.	422 lbs.
C-RO6-NG / LP	6	177,000 / 165,000	25,000 / 23,000	27,000 / 27,000	5 /10	Hotplate - NG45 Oven - NG39	Hotplate - LP54 Oven - LP52	11.8 x 11.8	(1) Oven 26.5 × 26 × 14	36 × 32.6 x 56.4	39.2 x 41.9 x 41.3	406 lbs.	561 lbs.
C-RO8-NG / LP	8	248,000 / 232,000	25,000 / 23,000	(2) Ovens Each - 24,000 / (2) Ovens Each - 24,000	5/10	Hotplate - NG45 Oven - NG44	Hotplate - LP54 Oven - LP53	11.8 x 11.8	(2) Ovens 20 × 26 × 14	48 × 32.6 × 56.4	51.2 x 41.9 x 41.3	547 lbs.	758 lbs.
C-RO10-NG / LP	10	304,000 / 284,000	25,000 / 23,000	(2) Ovens Each - 27,000 / (2) Ovens Each - 27,000	5 /10	Hotplate - NG45 Oven - NG39	Hotplate - LP54 Oven - LP52	11.8 x 11.8	(2) Ovens 26.5 × 26 x 14	60 × 32.6 × 56.4	63.2 x 41.9 x 41.3	739 lbs.	884 lbs.

^{*}Total height with stainless steel back splash and top shelf

NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY






















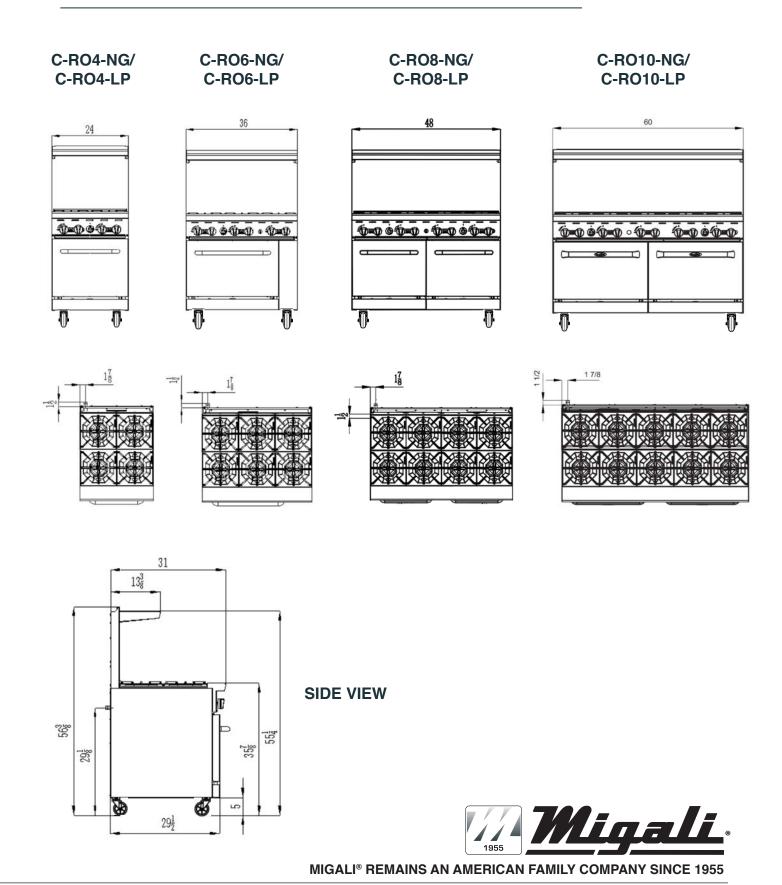













C-RO-36-NG C-RO2-24GL-NG C-RO4-12GL-NG

C-RO4-24GL-NG

C-RO6-24GL-NG

RANGES WITH GRIDDLES (NATURAL GAS)

- · High polished, stainless steel exterior
- 25,000 BTU/H rating per burner
- Heavy duty cast iron removable trivets
- Porcelain enamel over steel oven interior
- 3/4" thick polished steel griddle cooking surface for quick, even heating
- Beautiful ergonomic design and easy to clean
- Chrome temperature knobs & oven handle

- · Adjustable temperature oven knobs
- Standard with 6" casters (2x locking)
- · Adjustable oven shelf
- · Safety pilot oven shut-off, high limit switch
- · Manual ignition of burners
- · Valve type: Pilot lit, continuously on
- · All burners and gas tubing are constructed of stainless steel
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty

			BTU			IN TAKE TUBE	NOZZLE NO.	GRIDDLE	BURNER	NO. OF OVENS	EXTERIOR	PACKAGED		
MODEL	BURNERS	TOTAL BTU	PER BURNER	OVEN BTU/H	GRIDDLE BTU/H	PRES- SURE (W.C.)	NATURAL GAS	WORK SURFACE W X D	WORK SURFACE W X D	& INTERIOR DIMENSIONS W X D X H	DIMENSIONS W X D X H*	DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-RO- 36G-NG	0	102,000	N/A	27,000	(2) U-Shape - 27,000 (1) I-Shape - 21,000	5	(1) Oven - NG39 (2) Griddle U-Shape NG42 (1) Griddle I-Shape - NG45	36 x 20.6 Full Length	N/A	(1) Oven 26.5 × 26 × 14	36 × 32.6 x 56.4	39.2 x 41.9 x 41.3	487 lbs.	615 lbs.
C-RO2- 24GL-NG	2	125,000	25,000	27,000	(1) U-Shape - 27,000 (1) I-Shape - 21,000	5	(2) Hotplate - NG45 (1) Oven - NG39 (1) Griddle U Shape - NG42 (1) Griddle I Shape - NG45	24 x 20.6 Left Side	11.8 x 11.8	(1) Oven 26.5 × 26 × 14	36 × 32.6 × 56.4	39.2 x 41.9 x 41.3	463 lbs.	600 lbs.
C-RO4- 12GL-NG	4	148,000	25,000	27,000	(1) I-Shape - 21,000	5	(4) Hotplate - NG45 (1) Oven - NG39 (1) Griddle I Shape - NG45	12 x 20.6 Left Side	11.8 x 11.8	(1) Oven 26.5 × 26 × 14	36 × 32.6 × 56.4	39.2 x 41.9 x 41.3	437 lbs.	583 lbs.
C-RO4- 24GL-NG	4a	196,000	25,000	(2) Ovens / Each - 24,000	(1) U-Shape - 27,000 (1) I-Shape - 21,000	5	(4) Hotplate - NG45 (2) Oven - NG44 (1) Griddle U Shape - NG42 (1) Griddle I shape - NG45	24 x 20.6 Left Side	11.8 x 11.8	(2) Ovens 20 × 26 × 14	48 × 32.6 × 56.4	51.2 x 41.9 x 41.3	591 lbs.	803 lbs.
C-RO6- 24GL-NG	6	252,000	25,000	(2) Ovens / Each - 27,000	(1) U-Shape - 27,000 (1) I-Shape - 21,000	5	(6) Hotplate - NG45 (2) Oven - NG39 (1) Griddle U Shape - NG42 (1) Griddle I shape - NG45	24 x 20.6 Left Side	11.8 x 11.8	(2) Ovens 26.5 × 26 × 14	60 × 32.6 × 56.4	63.2 x 41.9 x 41.3	734 lbs.	927 lbs.

*Total height with stainless steel back splash and top shelf

NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY






















C-RO-36-NG C-RO2-24GL-NG C-RO4-12GL-NG C-RO4-24GL-NG C-RO6-24GL-NG



SIDE VIEW















C-RO-36-LP C-RO2-24GL-LP C-RO4-12GL-LP C-RO4-24GL-LP

C-RO6-24GL-LP

RANGES WITH GRIDDLES (LIQUID PROPANE)

- · High polished, stainless steel exterior
- 23,000 BTU/Hr rating per burner
- · Heavy duty cast iron removable trivets
- Porcelain enamel over steel oven interior
- 3/4" thick polished steel griddle cooking surface for quick, Manual ignition of burners even heating
- · Beautiful ergonomic design and easy to clean
- Chrome temperature knobs & oven handle

- · Adjustable temperature oven knobs
- · Standard with 6" casters (2x locking)
- Adjustable oven shelf
- · Safety pilot oven shut-off, high limit switch
- · Valve type: Pilot lit, continuously on
- · All burners and gas tubing are constructed of stainless steel
- Migali Industries[®] Protection Plan: 2 Year Parts & Labor Warranty

MODEL	BURNERS	TOTAL BTU	BTU PER BURNER	OVEN BTU/H	GRIDDLE BTU/H	IN TAKE TUBE PRES- SURE (W.C.)	NOZZLE NO. NATURAL GAS	GRIDDLE WORK SURFACE W X D	BURNER WORK SURFACE W X D	NO. OF OVENS & INTERIOR DIMENSIONS W X D X H	EXTERIOR DIMENSIONS W X D X H*	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-RO- 36G-LP	0	102,000	N/A	27,000	(2) U-Shape - 27,000 (1) I-Shape - 21,000	10	(1) Oven - LP52 (2) Griddle U-Shape LP52 (1) Griddle I-Shape - LP54	36 x 20.6 Full Length	N/A	(1) Oven 26.5 × 26 × 14	36 × 32.6 × 56.4	39.2 x 41.9 x 41.3	487 lbs.	615 lbs.
C-RO2- 24GL-LP	2	121,000	23,000	27,000	(1) U-Shape - 27,000 (1) I-Shape - 21,000	10	(2) Hotplate - LP54 (1) Oven - LP52 (1) Griddle U-Shape - LP52 (1) Griddle I-Shape - LP54	24 x 20.6 Left Side	11.8 x 11.8	(1) Oven 26.5 × 26 × 14	36 × 32.6 × 56.4	39.2 x 41.9 x 41.3	463 lbs.	600 lbs.
C-RO4- 12GL-LP	4	140,000	23,000	27,000	(1) I-Shape - 21,000	10	(4) Hotplate - LP54 (1) Oven - LP52 (1) Griddle I-Shape - LP54	12 x 20.6 Left Side	11.8 x 11.8	(1) Oven 26.5 × 26 × 14	36 × 32.6 × 56.4	39.2 x 41.9 x 41.3	437 lbs.	583 lbs.
C-RO4- 24GL-LP	4	188,000	23,000	(2) Ovens / Each - 24,000	(1) U-Shape - 27,000 (1) I-Shape - 21,000	10	(4) Hotplate - LP54 (2) Oven - LP53 (1) Griddle U-Shape - LP52 (1) Griddle I-Shape - LP54	24 x 20.6 Left Side	11.8 x 11.8	(2) Ovens 20 × 26 × 14	48 × 32.6 × 56.4	51.2 x 41.9 x 41.3	591 lbs.	803 lbs.
C-RO6- 24GL-LP	6	240,000	23,000	(2) Ovens / Each - 27,000	(1) U-Shape - 27,000 (1) I-Shape - 21,000	10	(6) Hotplate - LP54 (2) Oven - LP52 (1) Griddle U Shape - LP52 (1) Griddle I shape - LP54	24 x 20.6 Left Side	11.8 x 11.8	(2) Ovens 26.5 × 26 × 14	60 × 32.6 × 56.4	63.2 x 41.9 x 41.3	734 lbs.	927 lbs.

*Total height with stainless steel back splash and top shelf

NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE





















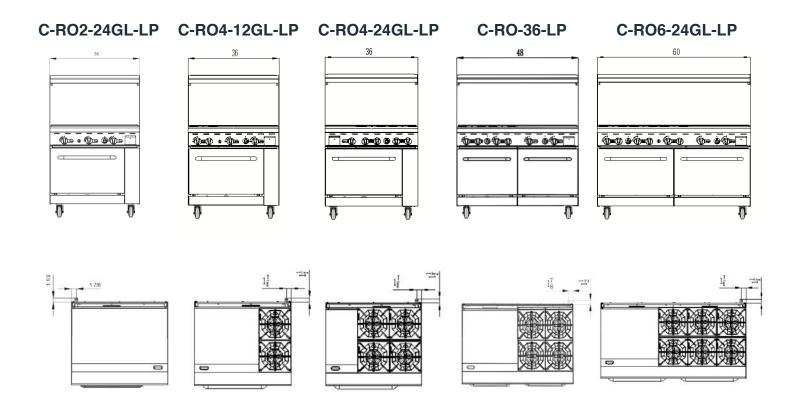



SIDE VIEW











C-F75-NG/LP

C-F40-NG/LP

C-F50-NG/LP

FRYERS

- Electro-mechanical thermostat for adjusting temperature Twin nickel chrome plated wire mesh baskets within a range of 200°F to 400°F
- 34,000 BTU (NG) and 30,000 BTU (LP) per burner
- · Beautiful ergonomic design and easy to clean
- · All stainless steel tank & cabinetry
- Removable basket hanger for cleaning purposes
- Manual pilot ignition
- Auto reset high limit control for high temperatures
- Cooling zone inside the fryer tank

- with blue plastic coated handles
- Built in flue deflector
- · Full port drain within valve
- Standard with 6" casters (2x Locking)
- Accessory: optional casters upon request
- Migali Industries® Protection Plan: 1 Year Parts & Labor Warranty, 5 Years Oil Tank Warranty

MODEL	BURNERS	VOLUME	TOTAL BTU NG/LP	BTU PER BURNER NG/LP	IN TAKE TUBE PRESSURE (W.C.) NG/LP	NOZZLE NO. NG/LP	IGNITION	VALVE TYPE	THERMOSTAT TEMP LIMIT	TEMP LIMIT	EXTERIOR DIMENSIONS W X D X H	PACKAGING DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-F40-NG / C-F40-LP	3	40 lbs.	102,000 / 90,000	34,000 / 30,000	4 /10	#36 / #52	Manual	Often open flame, flame protection	400° F	450° F	15.6 x 30.1 x 44.4	17.7 x 33.5 x 37.9	135 lbs.	160 lbs.
C-F50-NG / C-F50-LP	4	50 lbs.	136,000 / 120,000	34,000 / 30,000	4 /10	#36 / #52	Manual	Often open flame, flame protection	400° F	450° F	15.6 x 30.1 x 44.4	17.7 x 33.5 x 37.9	146 lbs.	172 lbs.
C-F75-NG / C-F75-LP	5	75 lbs	170,000 / 150,000	34,000 / 30,000	4 /10	#36 / #52	Manual	Often open flame, flame protection	400° F	450° F	21.1 x 30.1 x 44.4	23.2 x 33.5 x 37.9	166 lbs.	200 lbs.

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides - Do Not Store Combustibles Underneath Unit NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE






















C-F40-NG/LP





C-F50-NG/LP





C-F75-NG/LP











SIDE VIEW







C-SM-36-NG/LP

SALAMANDER BROILERS

- · Stainless steel exterior and interior
- Dual valve controls for left and right-side independent operation
- Two (2) 21,500 BTU high efficiency ceramic infared burners and standby pilots – totals 43,000 BTUs
- 1 Minute pre-heat time
- 4 position rack adjustments on Salamander Broiler

- One(1) removable broiler chrome rack
- Range mount kit for 36" range available upon request*
- · Manual ignition of burners
- Migali Industries® Protection Plan: 2 Years Parts
 & Labor Warranty

MODEL	BURNERS	GAS SPECS	TOTAL BTU NG / LP	BTU PER BURNER - NG/LP	INTAKE TUBE PRESSURE (W.C.) NG/LP	NOZZLE NO. - NG / LP	CONTROL METHOD	CONTROL VALVE TYPE	EXTERIOR DIMENSIONS W X D X H	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-SM-36-NG	2	NG	43,000	21,500	5	NG47	Independent Manual Control	Pilot Light	36 × 18 × 17.3	31.8 x 15.2 x 4	40 x 24.6 x 25.4	144 lbs.	168 lbs.
C-SM-36-LP	2	LP	43,000	21,500	10	LP54	Independent Manual Control	Pilot Light	36 × 18 × 17.3	31.8 x 15.2 x 4	40 x 24.6 x 25.4	144 lbs.	168 lbs.

Optional wall mount bracket part # 1988-54

*Part Number: 1759-1562 - Connecting Rod for Salamander/Cheesmelter

NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

























C-SM-36-NG/LP

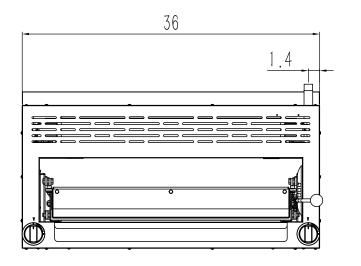













C-CM-36-NG/LP

CHEESEMELTERS

- Stainless steel exterior and interior
- Dual valve controls for left and right-side independent operation
- Two (2) 21,500 BTU high efficiency ceramic infared burners and standby pilots – totals 43,000 BTUs
- Removable broiler rack and crumb catcher
- Range mount kit for 36" range available upon request*

- Manual ignition of burners
- Natural gas or liquid propane configuration
- Migali Industries® Protection Plan: 2 Years Parts
 & Labor Warranty

MODEL	BURNERS	GAS SPECS	TOTAL BTU NG / LP	BTU PER BURNER - NG/LP	INTAKE TUBE PRESSURE (W.C.) NG / LP	NOZZLE NO. - NG / LP	CONTROL METHOD	CONTROL VALVE TYPE	EXTERIOR DIMENSIONS W X D X H	INTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-CM-36-NG	2	NG	43,000	21,500	5	NG47	Independent Manual Control	Pilot Light	36 × 18 × 17.3	31.5 x 15.5 x 8.3	40 x 24.6 x 25.4	95 lbs.	120 lbs.
C-CM-36-LP	2	LP	43,000	21,500	10	LP54	Independent Manual Control	Pilot Light	36 × 18 × 17.3	31.5 x 15.5 x 8.3	40 x 24.6 x 25.4	95 lbs.	120 lbs.

Optional wall mount bracket part # 1988-54

*Part Number: 1759-1562 - Connecting Rod for Salamander/Cheesmelter NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE




















C-CM-36-NG/LP

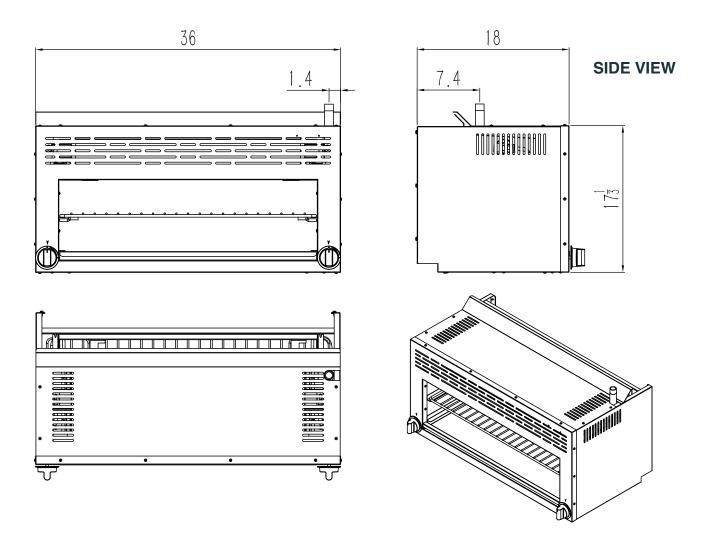











GRIDDLES

- · Manually controlled
- 3/4" thick on the griddle plate polished steel cooking surface for quick, even heating
- 30,000 BTU per "U" shape burner
- · Large 20" deep cooking surface
- Removable slide out waste tray
- · Beautiful ergonomic design and easy to clean
- (4) High polished, adjustable, stainless steel feet
- · Stainless steel grease trough with wide opening for easy cleaning
- Comes standard as Natural Gas with L.P orifice kit for in-field conversion
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty

MODEL	BURNERS	TOTAL BTU NG/LP	BTU PER BURNER NG / LP	IN TAKE TUBE PRES- SURE (W.C.) NG/LP	NOZZLE NO. NG/LP	IGNITION	VALVE TYPE	GRIDDLE PLATE WORKING AREA W X D X H	EXTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-G24	2	60,000	30,000	4/10	#37 / #51	Manual	Pilot Light	23.9 x 19.9 x .75	24 x 28.6 x 15.2	26.8 x 31.1 x 18.2	161 lbs.	195 lbs.
C-G36	3	90,000	30,000	4/10	#37 / #51	Manual	Pilot Light	35.7 x 19.9 x .75	36 x 28.6 x 15.2	38.6 x 31.1 x 18.2	232 lbs.	281 lbs.
C-G48	4	120,000	30,000	4/10	#37 / #51	Manual	Pilot Light	47.9 x 19.9 x .75	48 x 28.6 x 15.2	51.6 x 32.7 x 18.2	295 lbs.	416 lbs.

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides - Do Not Store Combustibles Underneath Unit NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE


















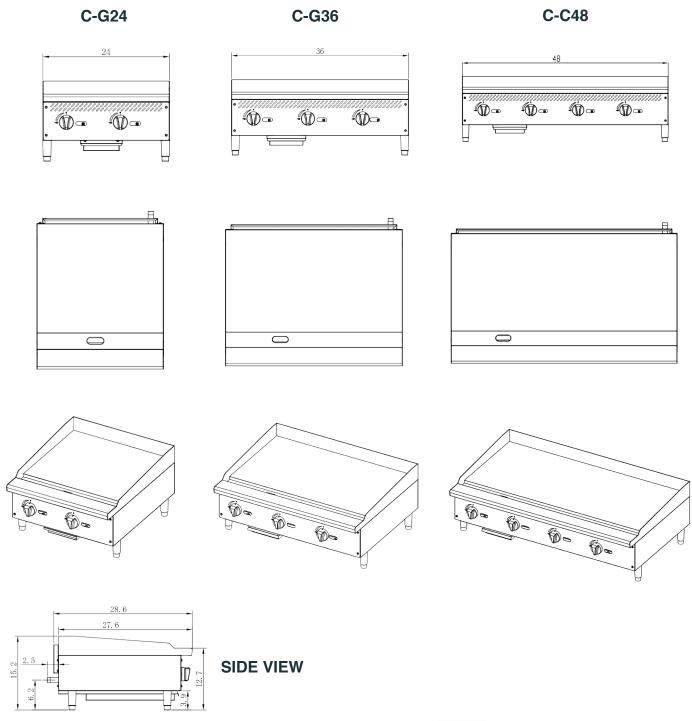





THERMOSTATIC GRIDDLES

- Thermostatically controlled
- 1" thick on the griddle plate polished steel cooking surface for quick, even heating
- 25,000 BTU per "U" shape burner
- · Large 20" deep cooking surface
- Removable slide out waste tray
- · Beautiful ergonomic design and easy to clean
- (4) High polished, adjustable, stainless steel feet
- Stainless steel grease trough with wide opening for easy cleaning
- Comes standard as Natural Gas with L.P orifice kit for in-field conversion
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty

MODEL	BURNERS	TOTAL BTU NG/LP	BTU PER BURNER NG / LP	IN TAKE TUBE PRES- SURE (W.C.) NG/LP	NOZZLE NO. NG/LP	IGNITION	VALVE TYPE	GRIDDLE PLATE WORKING AREA W X D X H	EXTERIOR DIMENSIONS W X D X H	PACKAGED DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-G24T	2	50,000	25,000	4/10	#37 / #51	Manual	Pilot Light	23.9 x 19.9 x 1	24 x 28.6 x 15.2	26.8 x 31.1 x 18.2	161 lbs.	195 lbs.
C-G36T	3	75,000	25,000	4/10	#37 / #51	Manual	Pilot Light	35.7 x 19.9 x 1	36 x 28.6 x 15.2	38.6 x 31.1 x 18.2	232 lbs.	281 lbs.
C-G48T	4	100,000	25,000	4/10	#37 / #51	Manual	Pilot Light	47.9 x 19.9 x 1	48 x 28.6 x 15.2	51.6 x 32.7 x 18.2	295 lbs.	416 lbs.

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides - Do Not Store Combustibles Underneath Unit NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTIGE (can Family Owner)


















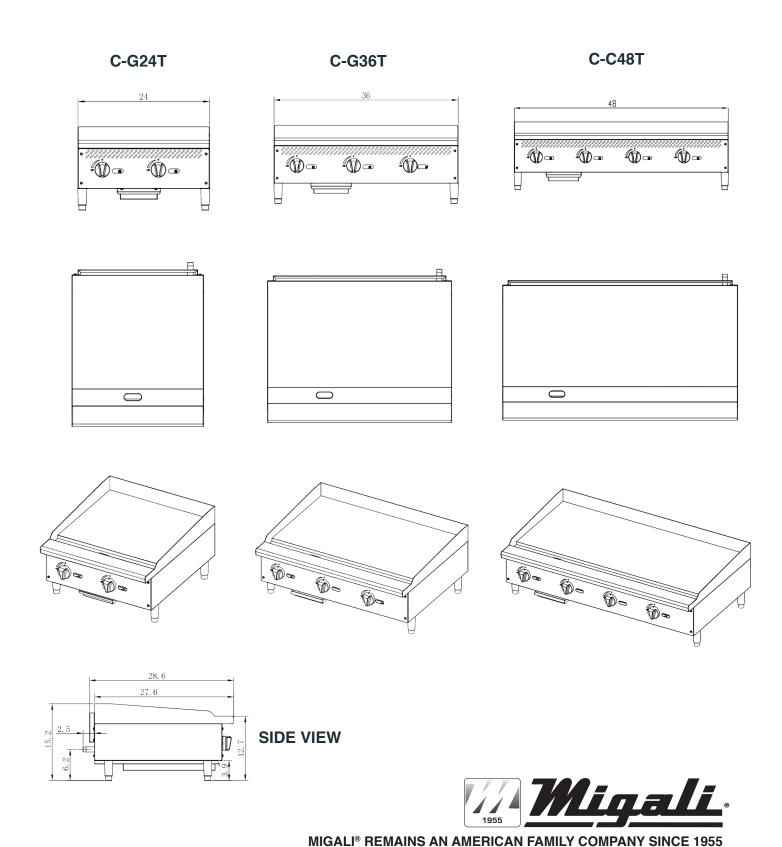









C-HP-2-12 C-HP-4-24 C-HP-6-36

HOT PLATES

- · Heavy duty cast iron removable trivets
- 25,000 BTU manually controlled burners
- · Removable, full width slide out waste tray
- · Beautiful ergonomic design and easy to clean
- High polished, stainless steel exterior and chrome temperature knobs
- (4) adjustable stainless steel feet
- Comes standard as Natural Gas with L.P orifice kit for in-field conversion
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty

MODEL	BURNERS	TOTAL BTU NG/LP	BTU PER BURNER - NG/LP	IN TAKE TUBE PRES- SURE (W.C.) NG/LP	NOZZLE NO. NG/LP	IGNITION	VALVE TYPE	TOP PLATE SIZE W X D X H	EXTERIOR DIMENSIONS W X D X H	PACKAGING DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-HP-2-12	2	50,000	25,000	4 /10	#43 / #53	Manual	Pilot Light	(2) 11.8 x 11.8	12 x 27.6 x 13.1	15 x 29.9 x 16.5	56 lbs.	80 lbs.
C-HP-4-24	4	100,000	25,000	4 /10	#43 / #53	Manual	Pilot Light	(4) 11.8 x 11.8	24 x 27.6 x 13.1	26.8 x 29.9 x 16.5	97 lbs.	125 lbs.
C-HP-6-36	6	150,000	25,000	4 /10	#43 / #53	Manual	Pilot Light	(6) 11.8 x 11.8	36 x 27.6 x 13.1	38.6 x 29.9 x 16.5	137 lbs.	180 lbs.

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides - Do Not Store Combustibles Underneath Unit NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE






















C-HP-2-12





C-HP-4-24




C-HP-6-36




















SIDE VIEW











0 01121

C-CR36

CHAR-ROCK BROILERS

- · Reversible heavy duty cast iron cooking grates with angled sides for flat or sloped positions
- · Cast iron grates underneath cooking grates to support char-rocks and proper airflow
- · Manually controlled cooking zones
- 35,000 BTU per "U" shape burner
- · Removable, full width slide out waste tray
- · Beautiful ergonomic design and easy to clean
- High polished, stainless steel exterior and chrome temperature knobs
- (4) adjustable stainless steel feet
- Comes standard as Natural Gas with L.P orifice kit for in-field conversion
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty

MODEL	BURNERS	TOTAL BTU NG/LP	BTU PER BURNER NG / LP	IN TAKE TUBE PRES- SURE (W.C.) NG/LP	NOZZLE NO. NG/LP	IGNITION	VALVE TYPE	WORKING AREA W X D	EXTERIOR DIMENSIONS W X D X H	PACKAGING DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-CR24	2	70,000	35,000	4 /10	#36 / #50	Manual	Pilot Light	23.9 x 20.2	24 x 27.6 x 15.2	26.8 x 29.9 x 18.2	137 lbs.	168 lbs.
C-CR36	3	105,000	35,000	4 /10	#36 / #50	Manual	Pilot Light	35.7 x 20.2	36 x 27.6 x 15.2	38.6 x 29.9 x 18.2	183 lbs.	238 lbs.
C-CR48	4	140,000	35,000	4 /10	#36 / #50	Manual	Pilot Light	47.9 x 20.2	48 x 27.6 x 15.2	50.8 x 29.9 x 18.2	243 lbs.	313 lbs.

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides - Do Not Store Combustibles Underneath Unit NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE
























C-CR24






















SIDE VIEW









C-RB36



C-RB48

RADIANT BROILERS

- · Reversible heavy duty cast iron cooking grates with angled sides for flat or sloped positions
- Manually controlled cooking zones
- 35,000 BTU per "U" shape burner
- · Removable, full width slide out waste tray
- · Beautiful ergonomic design and easy to clean
- High polished, stainless steel exterior and chrome temperature knobs
- (4) adjustable stainless steel feet
- Comes standard as Natural Gas with L.P orifice kit for in-field conversion.
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty

MODEL	BURNERS	TOTAL BTU NG/LP	BTU PER BURNER - NG/LP	IN TAKE TUBE PRES- SURE (W.C.) NG / LP	NOZZLE NO. NG/LP	IGNITION	VALVE TYPE	WORKING AREA W X D	EXTERIOR DIMENSIONS W X D X H	PACKAGING DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-RB24	2	70,000	35,000	4 /10	#36 / #50	Manual	Pilot Light	23.9 x 20.2	24 x 27.6 x 15.2	26.8 x 29.9 x 18.2	114 lbs.	147 lbs.
C-RB36	3	105,000	35,000	4 /10	#36 / #50	Manual	Pilot Light	35.7 x 20.2	36 x 27.6 x 15.2	38.6 x 29.9 x 18.2	161 lbs.	205 lbs.
C-RB48	4	140,000	35,000	4 /10	#36 / #50	Manual	Pilot Light	47.9 x 20.2	48 x 27.6 x 15.2	50.8 x 29.9 x 18.2	205 lbs.	257 lbs.

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides - Do Not Store Combustibles Underneath Unit NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE















































SIDE VIEW











C-SPS-2-18

STOCK POT STOVES

- · Heavy duty cast iron removable trivets
- 40,000 BTU manually controlled burners
- Bottom extra storage area
- · Beautiful ergonomic design and easy to clean
- High polished, stainless steel exterior and chrome temperature knobs
- (4) adjustable stainless steel feet
- Comes standard as Natural Gas with L.P orifice kit for in-field conversion
- Migali Industries® Protection Plan: 2 Year Parts & Labor Warranty

MODEL	BURNERS	TOTAL BTU NG/LP	BTU PER BURNER - NG/LP	IN TAKE TUBE PRES- SURE (W.C.) NG / LP	NOZZLE NO. NG/LP	IGNITION	VALVE TYPE	TOP PLATE SIZE W X D	EXTERIOR DIMENSIONS W X D X H	PACKAGING DIMENSIONS W X D X H	WEIGHT	PACKAGED WEIGHT
C-SPS-1-18	2	80,000	40,000	4 /10	#32 / #49	Manual	Pilot Light	(1) 17.8 x 20.9	18 x 20.9 x 22.8	20.9 x 24.8 x 25.2	106 lbs.	119 lbs.
C-SPS-2-18	4	160,000	40,000	4 /10	#32 / #49	Manual	Pilot Light	(2) 17.8 x 20.9	18 x 41.7 x 22.8	20.9 x 45.7 x 25.2	202 lbs.	222 lbs.

Gas Connection: 3/4" NPT on the right

Clearance for combustible work area: 6" rear & 15" sides - Do Not Store Combustibles Underneath Unit NOTE: Altitudes over 2,000 feet may need high latitude orifice adjustments to deliver BTU output listed

FOR COMMERCIAL USE ONLY

NOTE: MIGALI® RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE




















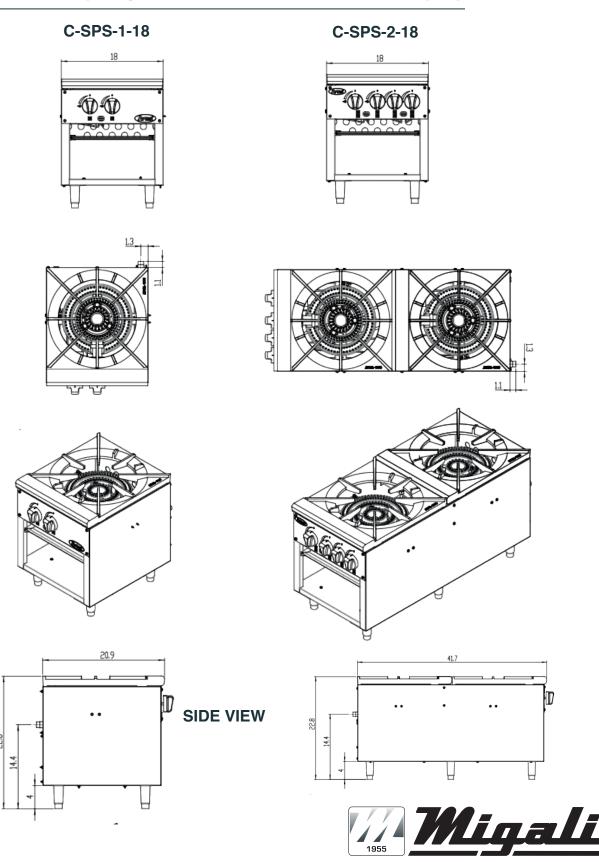



Refrigeration Warranty Protection Plan

Effective 3/1/2020

(2) Year Labor Warranty: Migali warrants to the original purchasers of the Migali unit sold a 2 Year Service Warranty, which begins at the date of registration or (90) days from the date of shipment by us, which ever is earlier. Migali reserves the right to service the unit only with an authorized Migali service agent. Unauthorized service of the unit is not subject to this warranty. The term "original purchaser" as used herein shall be deemed to mean that person, firm, association or corporation for whom the refrigeration unit referred to herein is originally installed at the original location; units moved or transferred to alternate location(s) that differ from the original registered or ship to location without pre-approval from Migali, will not be subject to this warranty. The Migali warranty is subject to indoor, commercial locations only; units that are installed at residential and/or outside locations are not included in this warranty. In addition, this warranty does not include units installed on food trucks, boats or any location using electricity originating from a generator.

(2) Year Parts: Migali warrants to the original purchaser the Migali unit sold and all parts thereof to be free from defects in material or workmanship, under normal use and service for a period of 2 years, from the date of registration, or (27) months from the date of shipment by us, whichever is earlier. Our obligation under this warranty shall be limited to repairing or replacing F.O.B. factory any of such product which proves thus defective and which our examination shall disclose to our satisfaction to be defective. Transportation Charges for Warranty Parts are to be prepaid by Claimant. Any part returned to Migali under the terms of this warranty must be accompanied by a record of the cabinet model number, serial number, return authorization number, and such return shall be on the basis of transportation charges prepaid.

(5)Years Compressor: Migali warrants the hermetically sealed compressor for (5) years, not to exceed (63) months from the date of shipment from our plant, provided, upon receipt of the compressor, manufacturer examination shows the sealed compressor to be defective. This extended warranty does not apply to any electrical controls, accumulator, starting components or wiring harness, which items are covered by the parts warranty listed above. Transportation Charges for Warranty Compressor are to be prepaid by claimant. The compressor warranty is valid for (1) compressor per refrigeration unit. Migali reserves the right to void this warranty due to the following: (A) Improper operation due to low voltage conditions, inadequate wiring, and accidents or damages that are not manufacturing defects. These are strictly the responsibility of the purchaser. (B) Condenser coils must be cleaned at regular intervals or at least once per month. Failure to do so can cause compressor malfunction and/or clogged capillary tubes which will void the warranty. (C) These units must operate in normal ambient conditions, temperatures of 90° F and 55% relative humidity or less. Overheating due to excessively hot environments may void this warranty. (D) These units are for indoor use only. No claims can be made against this warranty for loss of product. This contract does not apply outside the limits of the USA or Canada, nor does it apply to any part which has been subject to misuse, neglect, alternation, accident, or to any damage caused by transportation, flood, fire or the acts of God. Labor costs are not included with the compressor warranty unless the compressor failure occurs within the quidelines outlined in the (2) Year Labor Warranty section listed above.

These warranties are in lieu of all other warranties, expressed or implied, and all other obligations or liabilities on our part, and we we neither assume nor authorize any other person to assume for us any other obligation or liability in connection with the sale of said refrigeration units or any part thereof. This warranty shall not be assignable and shall be honored only in so far as the original purchaser.

MIGALI ASSUMES NO RESPONSIBILITY FOR INCIDENTAL, CONSEQUENTIAL, OR OTHER DAMAGES INCLUDING, BUT NOT LIMITED TO LOSS OR DAMAGE TO PROPERTY, LOSS OF PROFITS OR REVENUE, LOSS OF THE UNIT, LOSS OF STORED PRODUCT, LOSS OF TIME, OR INCONVENIENCE. WARRANTIES ARE VALID FOR MIGALI BRAND EQUIPMENT ONLY. WARRANTIES ARE NOT VALID UNLESS THE PURCHASED ITEM AND CORRESPONDING INVOICE IS PAID IN FULL ACCORDING TO MIGALI TERMS AND CONDITIONS

All Warranty Service Calls must be Pre-approved by Migali® prior to contracting service agents or purchasing over-the-counter parts for reimbursement.

YOU MUST REGISTER YOUR MIGALI PURCHASE FOR THIS WARRANTY TO BEGIN. GO TO www.migali.com/warranty-information TO REGISTER NOW.

MIGALI® INDUSTRIES TEL: (800) 852 5292 FAX: (856) 963 3604 WEB: www.migali.com/customer-support



Refrigeration Warranty Protection Plan

THE FOLLOWING ITEMS ARE COVERED UNDER THE MIGALI® PROTECTION PLAN

Compressor:

Hermetically Sealed Compressor

Parte

Compressor starting components (Capacitor, Overload & Relay), Evaporator and Condenser Coils, Evaporator and Condenser Motors, Fan Blades, Drier Filter, Capillary Tubes, Expansion Valves, Thermostats, Control Boards, Relays, Temperature Displays, Timers, Freon Leaks, Refrigerants including 404a, 134a, R600 and R290 (limit to the full charge amount (oz) listed on the model serial tag), Electrical Wires, Relays, Terminal Blocks, Drain Lines, Drain Line Heater Wires, Condensate Heating Elements, Evaporator Defrost Rods or any defective parts relating to the refrigeration system.

Labor:

Service necessary for the malfunctioning of any parts or systems listed above under normal operating conditions to be reimbursed according to Migali Labor Guideline Form which includes service travel up to 75 miles.

Freight:

UPS freight charges will be prepaid by Migali if the defective compressors or parts are diagnosed as defective within (2) years, i.e. (730) days of the warranty registration date. Migali pays UPS ground charges only. All other expedited freight charges are the responsibility of the owner/operator.

THE FOLLOWING ITEMS ARE NOT COVERED UNDER THE MIGALI® PROTECTION PLAN

Compressor:

Compressor or compressor parts deemed defective through improper maintenance and cleaning, incorrect or low voltages, GFI related and electrical surge issues, failures due to running a unit off a generator, or improper installation of the refrigeration unit.

Parts:

Door gaskets, door or lid handles, glass doors, body of the refrigeration unit, casters, door or lid hinges, door opening breaker caps, breakage of any parts due to improper use such as standing on the refrigerator or mishandling damages, failed electronics and controllers due to electrical surges or water damage from an outside source. Migali will not be held responsible for defective add-on accessories manufactured by a 3rd party not provided by Migali.

Labor:

Water, condensation or humidity inside or outside of the unit (unless service agent deems failure due to defective heating element, heater wire or broken evaporator pan), clogged evaporator drains, re-adjusting of leveling of unit, iced-up evaporator coil due to temperature controller set too low or improperly, adjusting temperature control settings, replacing damaged controllers from incorrect electrical installation or damages from from an outside water source, problems caused by improper installation, low voltage due to unit running off an extension cord or multiple appliances plugged into one outlet, electrical fuses tripping due to GFI's, malfunctioning unit due to improper amperage/voltage for the specific refrigeration model, cutting the factory installed plug, temperature issues due to dirty condenser, overstocking of interior, restrictions of airflow inside or outside of the refrigeration unit, excessive heat exceeding 90° F/55% relative humidity, direct heat from cooking equipment affecting the refrigeration units performance. Glass door models installed at elevations over 5,000 ft above sea level are not covered under this warranty. For remote areas, a service tech that travels in excess of 75 miles one way may be subject to additional travel fees at Migali's discretion.

Stored Product & Loss of Revenue:

MIGALI® ASSUMES NO RESPONSIBILITY FOR INCIDENTAL, CONSEQUENTIAL, OR OTHER DAMAGES INCLUDING, BUT NOT LIMITED TO LOSS OR DAMAGE TO PROPERTY, LOSS OF PROFITS OR REVENUE, LOSS OF THE UNIT, LOSS OF STORED PRODUCT, LOSS OF TIME, OR INCONVENIENCE.

Freight:

UPS freight charges must be paid by the owner/operator if any parts or compressors are diagnosed as defective (2) years, i.e. (730) days after the registration date.

FOR SERVICE CALL TOLL FREE: 1-800-852-5292
or SUBMIT A CLAIM ONLINE @ www.migali.com/warranty-claims
SERVICE FOR LABOR WARRANTY MAY TAKE UP TO 72 HOURS

MIGALI® INDUSTRIES TEL: (800) 852 5292 FAX: (856) 963 3604 WEB: www.migali.com/customer-support



Cooking Warranty Protection Plan

Effective 3/1/2020

Commercial Gas Fryers and Convection Ovens

- (1) Year Labor Warranty: Migali warrants to the original purchasers of the Migali unit sold a 1 Year Service Warranty, which begins at the date of registration or (90) days from the date of shipment by us, which ever is earlier. Migali reserves the right to service the unit only with an authorized Migali service agent. Unauthorized service of the unit is not subject to this warranty. The term "original purchaser" as used herein shall be deemed to mean that person, firm, association or corporation for whom the cooking appliance referred to herein is originally installed at the original location; units moved or transferred to alternate location(s) that differ from the original registered or ship to location without pre-approval from Migali, will not be subject to this warranty. The Migali warranty is subject to indoor, commercial locations only; units that are installed at residential and/or outside locations are not included in this warranty.
- (1) Year Parts Warranty: Migali warrants to the original purchaser the Migali unit sold and all parts thereof to be free from defects in material or workmanship, under normal use and service for a period of 1 year, from the date of registration, or (15) months from the date of shipment by us, whichever is earlier. Our obligation under this warranty shall be limited to repairing or replacing F.O.B. factory any of such product which proves thus defective and which our examination shall disclose to our satisfaction to be defective. Transportation Charges for Warranty Parts are to be prepaid by Claimant. Any part returned to Migali under the terms of this warranty must be accompanied by a record of the model number, serial number, return authorization number, and such return shall be on the basis of transportation charges prepaid.
- (5)Year Fryer Tank Warranty: Migali warrants that the all stainless steel fryer tank will be free from defects for (5) years. If a leak occurs under normal use within the first year, the entire fryer will be replaced. Leaks that occur in the following (4) years after the effective registered start date will receive a replacement fryer tank at no charge. Labor and shipping costs will be the responsibility of the end-user.

Commercial Gas Cooking Equipment

- (2) Year Labor Warranty: Migali warrants to the original purchasers of the Migali unit sold a 2 Year Service Warranty, which begins at the date of registration or (90) days from the date of shipment by us, which ever is earlier. Migali reserves the right to service the unit only with an authorized Migali service agent. Unauthorized service of the unit is not subject to this warranty. The term "original purchaser" as used herein shall be deemed to mean that person, firm, association or corporation for whom the cooking appliance referred to herein is originally installed at the original location; units moved or transferred to alternate location(s) that differ from the original registered or ship to location without pre-approval from Migali, will not be subject to this warranty. The Migali warranty is subject to indoor, commercial locations only; units that are installed at residential and/or outside locations are not included in this warranty.
- (2) Year Parts Warranty: Migali warrants to the original purchaser the Migali unit sold and all parts thereof to be free from defects in material or workmanship, under normal use and service for a period of 2 years, from the date of registration, or (27) months from the date of shipment by us, whichever is earlier. Our obligation under this warranty shall be limited to repairing or replacing F.O.B. factory any of such product which proves thus defective and which our examination shall disclose to our satisfaction to be defective. Transportation Charges for Warranty Parts are to be prepaid by Claimant. Any part returned to Migali under the terms of this warranty must be accompanied by a record of the model number, serial number, return authorization number, and such return shall be on the basis of transportation charges prepaid.

These warranties are in lieu of all other warranties, expressed or implied, and all other obligations or liabilities on our part, and we we neither assume nor authorize any other person to assume for us any other obligation or liability in connection with the sale of said cooking appliances or any part thereof. This warranty shall not be assignable and shall be honored only in so far as the original purchaser.

MIGALI ASSUMES NO RESPONSIBILITY FOR INCIDENTAL, CONSEQUENTIAL, OR OTHER DAMAGES INCLUDING, BUT NOT LIMITED TO LOSS OR DAMAGE TO PROPERTY, LOSS OF PROFITS OR REVENUE, LOSS OF THE UNIT, LOSS OF FOOD PRODUCT, LOSS OF TIME, OR INCONVENIENCE. WARRANTIES ARE VALID FOR MIGALI BRAND EQUIPMENT ONLY. WARRANTIES ARE NOT VALID UNLESS THE PURCHASED ITEM AND CORRESPONDING INVOICE IS PAID IN FULL ACCORDING TO MIGALI TERMS AND CONDITIONS

All Warranty Service Calls must be Pre-approved by Migali® prior to contracting service agents or purchasing over-the-counter parts for reimbursement.

MIGALI® INDUSTRIES TEL: (800) 852 5292 FAX: (856) 963 3604 WEB: www.migali.com/support



Warranty Protection Plan for Cooking Equipment

THE FOLLOWING ITEMS ARE COVERED UNDER THE MIGALI® PROTECTION PLAN

Fryer Tank:

Under normal usage, a brand new fryer will be replaced if there is a leak inside the tank within the first year of installation. A new fryer tank will be replaced if there is a leak inside the tank in the proceeding (5) years after the date of registration.

Parts:

Cooking equipment gas tubes, burners, orifices, thermostats and high temperature limit controls that are defective under normal use.

Labor:

Service necessary for the malfunctioning of any parts or systems listed above under normal operating conditions to be reimbursed according to Migali Labor Guideline Form which includes service travel up to 75 miles.

Freight:

UPS freight charges will be prepaid by Migali if the defective parts are diagnosed as defective within (2) years, i.e. (730) days of the warranty registration date. Migali pays UPS ground charges only. All other expedited freight charges are the responsibility of the owner/operator.

THE FOLLOWING ITEMS ARE NOT COVERED UNDER THE MIGALI® PROTECTION PLAN

Fryer Tank:

A fryer tank leak due to the improper installation, operation or maintenance.

Parts:

Chrome metal casted cooking knobs, cooking equipment cabinetry, cast iron cooking grates and plates.

Labor:

Service necessary for the malfunctioning of any parts or systems listed above under abnormal operating conditions, improper installation and/or maintenance is not covered under this warranty. For remote areas, a service tech that travels in excess of 75 miles one way may be subject to additional travel fees at Migali's discretion.

Stored Product & Loss of Revenue:

MIGALI® ASSUMES NO RESPONSIBILITY FOR INCIDENTAL, CONSEQUENTIAL, OR OTHER DAMAGES INCLUDING, BUT NOT LIMITED TO LOSS OR DAMAGE TO PROPERTY, LOSS OF PROFITS OR REVENUE, LOSS OF THE UNIT, LOSS OF FOOD PRODUCT, LOSS OF TIME, OR INCONVENIENCE.

Freight

UPS freight charges must be paid by the owner/operator if any parts diagnosed as defective (2) years, i.e. (730) days after the registration date.

YOU MUST REGISTER YOUR MIGALI PURCHASE FOR THIS WARRANTY TO BEGIN. GO TO www.migali.com/warranty-information TO REGISTER NOW.

FOR SERVICE CALL TOLL FREE: 1-800-852-5292
PLEASE HAVE THE MODEL & SERIAL NUMBER IN HAND
SERVICE FOR LABOR WARRANTY MAY TAKE UP TO 72 HOURS

MIGALI® INDUSTRIES TEL: (800) 852 5292 FAX: (856) 963 3604 WEB: www.migali.com/support























MIGALI® REMAINS AN AMERICAN FAMILY COMPANY SINCE 1955



MIGALI INDUSTRIES, INC

1 Triangle Lane, Blackwood, NJ 08012

Phone: 800 852 5292 Fax: 856 963 3604

Email: contact@migali.com Web: www.migali.com